


AIRFOIL



GRILLES
DUCT
FITTINGS

making it happen sooner...

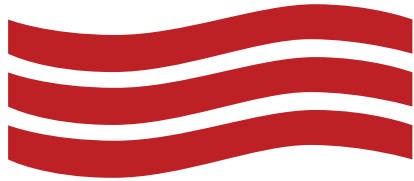

Quality
Endorsed
Company
ISO 9001
 SAI GLOBAL



**LINEAR SLOT DIFFUSER /
PLASTER MOUNTING FRAME
LSD25-PMF**



LINEAR SLOT DIFFUSER / PLASTER MOUNTING FRAME **LSD25-PMF**

PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Australian Made premium Linear Slot Diffuser with Plaster Mounting Frame (LSD25-PMF) provides a highly adaptable method of air diffusion. Constructed from Airfoil's engineered aluminium extrusion, the Linear Slot Diffuser (LSD25-PMF) is designed for both supply and return air applications. With an overall frame size of 28mm and a depth of 50mm, this modern Linear Slot Diffuser is typically ceiling-mounted for a sleek linear appearance. Installation is fast and efficient thanks to its innovative two-stage system:

1. The clip-in Plaster Mounting Frame is fitted to the ceiling batten or furring channel prior to the plasterboard construction
2. The Linear Slot Diffuser simply clicks into place, ensuring a secure, seamless finish

Internal Black "J" Blades are housed within a 19mm "T" Bar style extrusion, offering full adjustability up to 180 degrees for versatile air throw patterns. Airfoil's superior 25mm slot opening design ensures greater air volume per slot and reduced noise, promoting effective room air circulation.

The LSD25-PMF can accommodate up to 6 slots, with 1 to 4 slot models available in lengths up to 4 meters and 5 or 6 slot models recommended to be made in 2.5 meter sections due to weight restrictions during installation. Additionally, the LSD25-PMF comes complete with Airfoil's Safety Chain and Swivel Safety Bracket.

For longer metered runs, Airfoil provides Joining Strips (JS) that align and join straight cut ends, creating a seamless continuous length of linear slot.

Available in our standard white powder-coated finish or Natural Anodised aluminium silver finish, the LSD25-PMF can also be powder-coated to any specified colour upon request. This highly sought-after mode of air diffusion is perfect for various applications, including perimeter office spaces, airports, corridors, hospitals, shopping centres, cinemas, and any domestic or commercial setting where a variable air throw pattern is needed.

LINEAR SLOT DIFFUSER / PLASTER MOUNTING FRAME **LSD25-PMF**


PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – LSD25-PMF**
- Australian Made and Designed
- Aluminium construction
- Clip in Plaster Mounting Frame
- Suitable for 13mm gyprock
- Easy installation
- Used for Supply and Return air applications
- Manufactured to any length (max. 1 piece length = 4m)
- Slot opening size 25mm
- Overall frame size 28mm
- Plaster Mounting Frame depth of 50mm
- “T” Bar size of 19mm
- Provides any variable air throw pattern from a vertical or horizontal position
- Ceiling mounted
- Comes complete with Airfoil’s Safety Chain and Swivel Safety Bracket
- Offers clean linear line appearance
- Black “J” Blades are fully adjustable to 180 degrees
- Comes complete with Airfoil’s Joining Strips for neat alignment
- Available in our standard white powder-coated range
- Special powder-coated colours available on request
- Product suitable for perimeter office space, corridors, airports, hospitals, shopping centres, cinemas and any domestic or commercial application
- Available with Airfoil’s Linear Boot (LB) manufactured to suit slot width
- Airfoil tested information available
- **The following metric performance data has been derived from exhaustive testing in elaborate laboratories of acoustic and vibrational engineers Louis A. Challis and Associates Proprietary Limited. Darling Street, Sydney 2000**



REMOVABLE CORE LINEAR SLOT DIFFUSER LSD25-PMF

CROSS SECTIONAL DIAGRAM

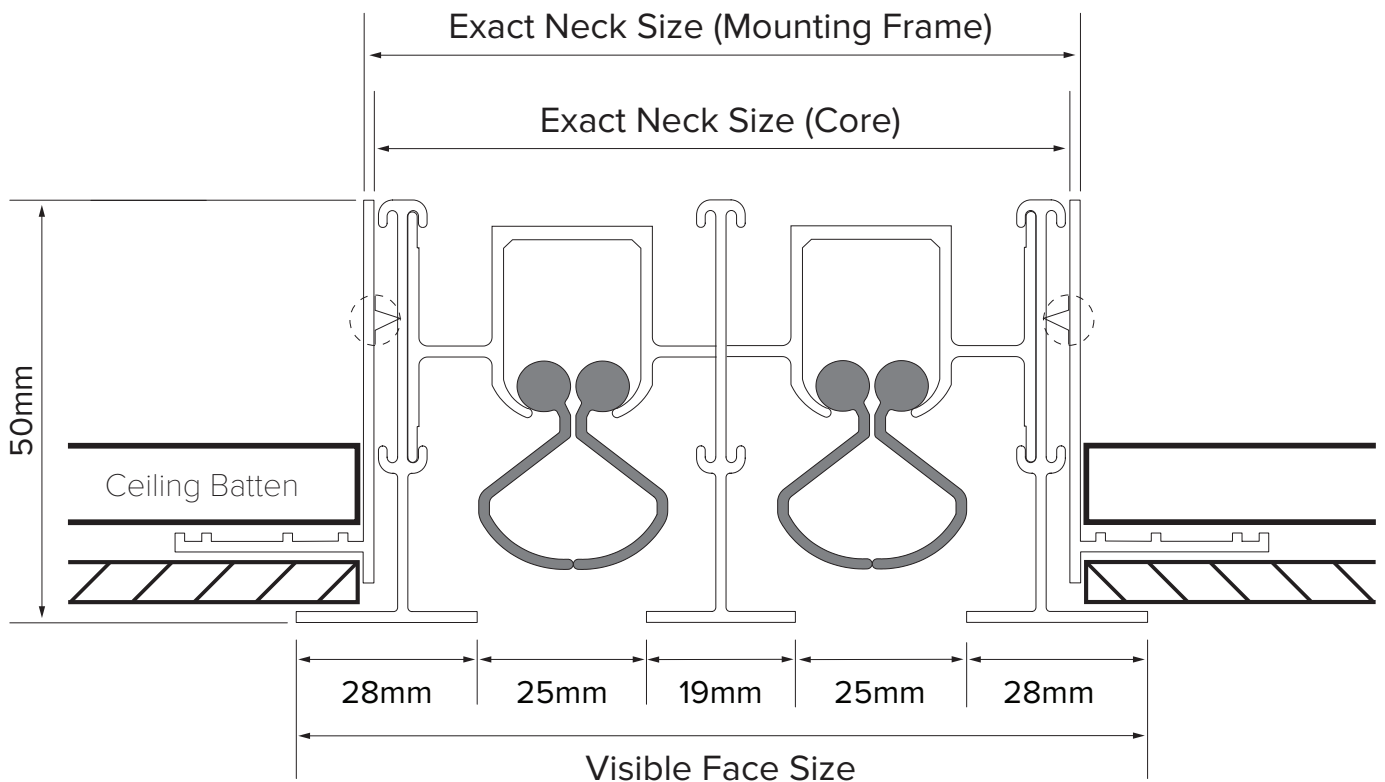

DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.

REMOVABLE CORE LINEAR SLOT DIFFUSER LSD25-PMF

SLOT ORDERING CODES

PRODUCT CODE	SLOT	SLOT WIDTH	PLASTER FRAME SIZE	EXACT NECK SIZE	FACE SIZE
LSD25-PMF-1	1	25mm	51mm	46mm	81mm
LSD25-PMF-2	2	25mm	96mm	91mm	126mm
LSD25-PMF-3	3	25mm	141mm	136mm	171mm
LSD25-PMF-4	4	25mm	186mm	181mm	216mm
LSD25-PMF-5	5	25mm	231mm	226mm	261mm
LSD25-PMF-6	6	25mm	276mm	271mm	306mm
LSD25-PMF-7	7	25mm	321mm	316mm	351mm
LSD25-PMF-8	8	25mm	366mm	361mm	396mm

PERFORMANCE DATA - LSD20-PMF SLOT WIDTH SUPPLY APPLICATION

No. Slots	Total Press.	Horiz.	1		4		9		16		24		35		49		62	
	Pascals.	Vert.	1	2	6	10	15	21	29	37								
1	Lit / sec / metre		12		25		37		50		65		75		90		100	
	NR		-		-		16		25		32		37		42		46	
	Throw	Hor.	0.1	1	0.4	3.4	1	4	1.8	4.6	2.8	5.2	3.4	5.8	4.8	6.2	3.8	6.8
	in metres	Vert.	0.6		2.4		3.8		4.4		4.6		5.2		5.6		5.8	
2	Lit / sec / metre		25		50		75		100		125		150		175		200	
	NR		-		-		21		30		37		42		47		51	
	Throw	Hor.	0.4	1.8	1	4.6	1.8	5.8	3.4	6.8	4.4	7.4	4.6	8.2	5	8.2	5.6	9.6
	in metres	Vert.	1.6		3.4		5		5.8		6.8		7.6		8		8.6	
3	Lit / sec / metre		37		75		115		150		185		225		260		300	
	NR		-		16		24		33		40		45		50		54	
	Throw	Hor.	0.4	3.2	1.2	5.8	3.2	7	4	8.2	5	9.2	5.8	9.8	6.2	10.8	6.8	11.4
	in metres	Vert.	2.2		4		6.2		7.4		8.2		8.8		9.8		10.4	
4	Lit / sec / metre		50		100		150		200		250		300		350		400	
	NR		-		13		26		35		42		47		52		56	
	Throw	Hor.	0.6	3.4	1.8	6.8	3.8	8.2	4.6	9.6	6.2	10.4	6.8	11.4	7.4	12.2	7.6	13.2
	in metres	Vert.	-		13		26		35		42		47		52		56	
5	Lit / sec / metre		65		125		185		250		310		375		435		495	
	NR		-		14		27		36		43		48		53		57	
	Throw	Hor.	0.6	4	2.4	7.4	4	9.2	5.6	10.4	6.8	11.6	7.4	12.8	8	13.8	8.6	14.6
	in metres	Vert.	2.8		5.2		7.6		9.6		10.4		11.6		12.6		13.2	
6	Lit / sec / metre		75		150		225		300		375		445		520		595	
	NR		-		15		28		37		44		49		54		58	
	Throw	Hor.	1	4.4	2.8	8.2	4.6	9.8	5.8	11.4	7.4	12.8	8.2	13.8	8.8	15	9.2	16
	in metres	Vert.	2.8		5.8		8.6		10.4		11.6		12.6		13.8		14.6	
7	Lit / sec / metre		90		175		260		350		435		520		610		695	
	NR		-		16		29		38		45		50		55		59	
	Throw	Hor.	1	4.6	3.2	8.6	4.6	10.8	6.4	12.2	8	13.8	8.8	15	9.6	16.2	10.2	17.2
	in metres	Vert.	3.2		6.2		9.2		11		12.6		13.8		14.6		16	
8	Lit / sec / metre		100		200		300		400		495		595		695		795	
	NR		-		17		30		39		46		51		56		60	
	Throw	Hor.	1.2	5	3.4	9.6	5	11.4	6.8	13.2	8.6	14.6	9.2	16	10.2	17.2	10.8	18.4
	in metres	Vert.	3.4		6.8		9.8		12		13.2		14.6		16		16.8	

REMOVABLE CORE LINEAR SLOT DIFFUSER LSD25-PMF

PERFORMANCE DATA - LSD25-PMF SLOT WIDTH RETURN APPLICATION

No. Slot	Negative Static Pressure in Pascals	5	10	18	27	40	54	70	112
1	Lit / sec / metre	31	47	65	80	95	110	125	155
	NR	-	14	22	28	33	37	41	47
2	Lit / sec / metre	65	95	125	155	185	220	250	310
	NR	-	17	25	31	36	40	44	50
3	Lit / sec / metre	95	140	185	235	280	325	375	465
	NR	-	19	27	33	38	42	46	52
4	Lit / sec / metre	125	185	250	310	375	435	495	620
	NR	-	20	28	34	39	43	47	53
5	Lit / sec / metre	155	235	310	390	465	545	620	775
	NR	-	21	29	35	40	44	48	54
6	Lit / sec / metre	185	280	375	465	560	650	745	930
	NR	-	22	30	36	41	45	49	55
7	Lit / sec / metre	220	325	435	545	650	760	870	1085
	NR	-	23	31	37	42	46	50	56
8	Lit / sec / metre	250	375	495	620	745	870	995	1240
	NR	-	23	31	37	42	46	50	56

