


Ceiling swirl diffusers


Type TDF-SilentAIR



Plenum box
with damper blade
(optional)

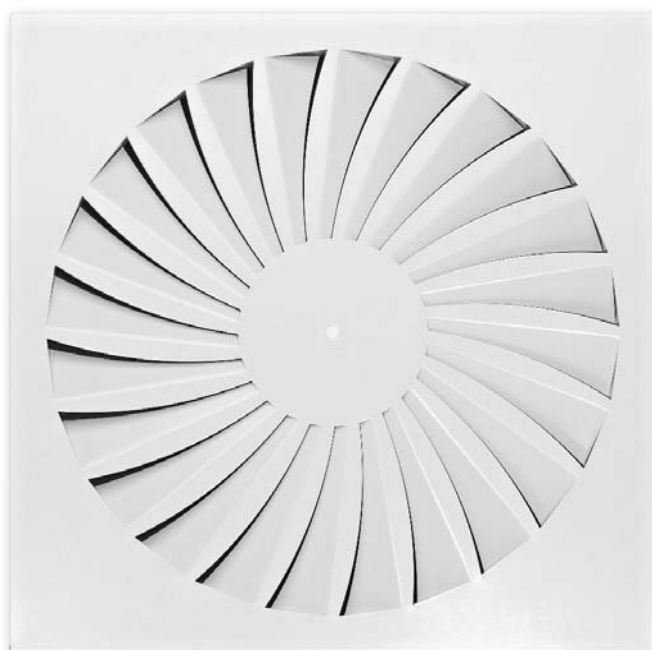

Horizontal
swirling air discharge



Circular diffuser face

With very low sound power level for comfort zones, with fixed air control blades

Circular and square ceiling swirl diffusers

- Nominal sizes 300, 400, 500, 600, 625
- Volume flow rate range 10 – 295 l/s or 36 – 1026 m³/h
- Diffuser face made of galvanised sheet steel, powder-coated
- For supply and extract air
- For variable and constant volume flows
- For all types of ceiling systems,
and with an extended border also suitable for freely suspended installation
- High induction results in a rapid reduction of temperature differences
and airflow velocities
- Ideal for comfort zones

Optional equipment and accessories

- Exposed diffuser face available in RAL CLASSIC colours
- Horizontal or vertical duct connection
- Acoustically optimised plenum box FLEXTRO
- Plenum box with cord-operated damper blade and pressure tap

Type

TDF-SilentAIR

General information

Order code

Quick sizing

Dimensions and weight – TDF-Q

Dimensions and weight – TDF-R

Installation details

Specification text

Basic information and nomenclature

Page

1.1 – 102

1.1 – 106

1.1 – 107

1.1 – 109

1.1 – 113

1.1 – 117

1.1 – 118

1.6 – 1

Variants

TDF-SA-Q-Z



TDF-SA-R-Z/600




Product examples

Installation examples

Installation in T-bar ceilings



Installation in T-bar ceilings, arrangement in a row

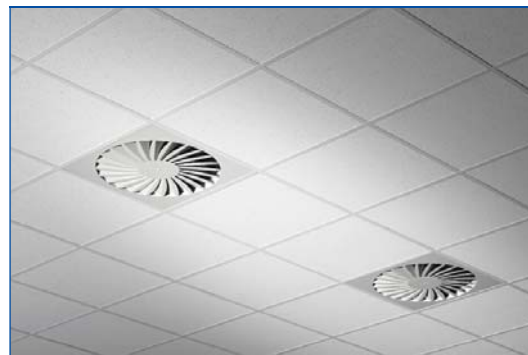

Installation in continuous ceilings



Description

For detailed information on plenum boxes see Chapter K1 – 1.5.

Application

- Type TDF-SilentAIR ceiling swirl diffusers are used as supply air or extract air diffusers for comfort zones
- Attractive design element for building owners and architects with demanding aesthetic requirements
- Horizontal swirling supply air discharge for mixed flow ventilation
- The efficient swirl creates high induction levels, thereby rapidly reducing temperature differences and airflow velocities (supply air variant)
- For variable and constant volume flows
- For supply air to room air temperature differences from –12 to +10 K
- For room heights up to 4 m (lower edge of suspended ceiling)
- For all types of ceiling systems
- With an extended border also suitable for freely suspended installation (supply air variant)

Variants

- TDF-SA-Q: Square diffuser face
- TDF-SA-R: Circular diffuser face
- TDF-SA-*-Z: Supply air
- TDF-SA-*-A: Extract air

Connection

- H: Horizontal duct connection
- V: Vertical duct connection
- X: Flexible plenum box FLEXTRO

Nominal sizes

- 300, 400, 500, 600, 625

Attachments

- M: Damper blade for volume flow rate balancing
- MN: Pressure tap and cord-operated damper blade for volume flow rate balancing with the diffuser face in place

Accessories

- Lip seal

Special characteristics

- Very low sound power level, ideal for comfort zones
- Fixed blades
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Horizontal or vertical duct connection

Parts and characteristics

- Circular or square diffuser face
- Diffuser face with fixed air control blades
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Materials and surfaces

- Diffuser face made of galvanised sheet steel
- V, H: Plenum box and cross bar made of galvanised sheet steel
- X: Plenum box made of plastic and galvanised sheet steel
- Lip seal made of rubber
- Diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

Installation and commissioning

- Preferably for rooms with a clear height up to 4.0 m
- Flush ceiling installation
- Freely suspended installation only with an extended border (supply air variant)
- Horizontal or vertical duct connection
- If necessary, carry out volume flow rate balancing with damper blade

Standards and guidelines

- Sound power level of the air-regenerated noise measured according to EN ISO 5135

Maintenance

- Maintenance-free as construction and materials are not subject to wear
- Inspection and cleaning to VDI 6022

Technical data

Nominal sizes	300, 400, 500, 600, 625 mm
Minimum volume flow rate, with $\Delta t_z = -6$ K	10 – 42 l/s or 36 – 151 m ³ /h
Maximum volume flow rate, with $L_{WA} \approx 50$ dB(A)	80 – 285 l/s or 288 – 1026 m ³ /h
Supply air to room air temperature difference	–12 to +10 K

Function

Functional description


Ceiling swirl diffusers in air conditioning systems create a swirl to supply air to rooms. The resulting airflow induces high levels of room air, thereby rapidly reducing the airflow velocity and the temperature difference between supply air and room air. Ceiling swirl diffusers allow for large volume flow rates. The result is a mixed flow ventilation in comfort zones, with good overall room ventilation, creating only very little turbulence in the occupied zone.

Type TDF ceiling swirl diffusers have fixed blades. Air discharge is horizontal radial. The supply air to room air temperature difference may range from -12 to $+10$ K.

A damper blade (optional) simplifies volume flow rate balancing for commissioning. Pressure tap and cord-operated damper blade (optional) allow for volume flow rate balancing with the diffuser face in place.

To give rooms an aesthetic, uniform look, Type TDF diffusers may also be used for extract air.


Schematic illustration of the TDF-SA, with plenum box for horizontal duct connection

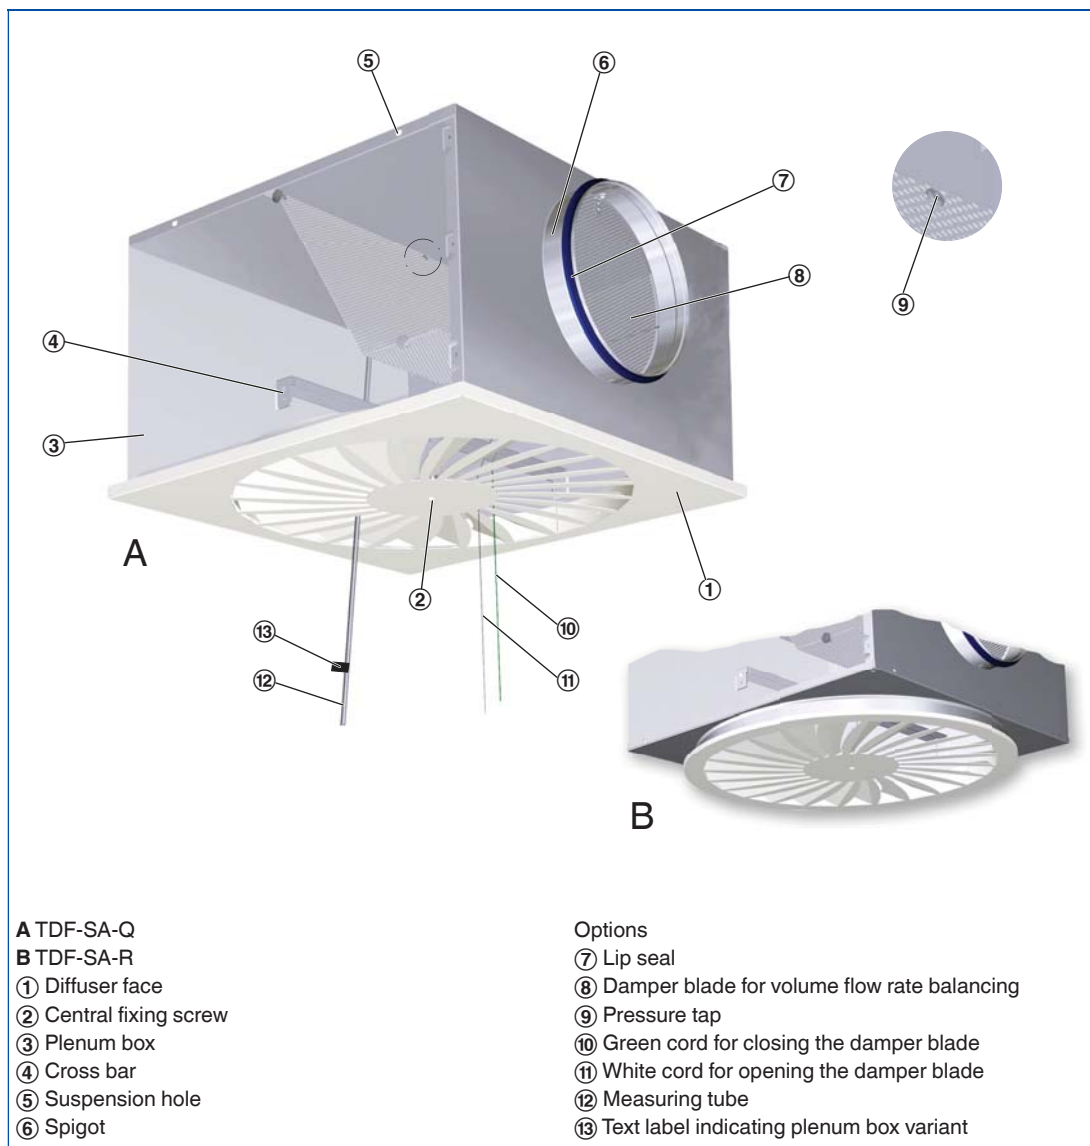

Air patterns

Horizontal air discharge

Horizontal omni directional air discharge

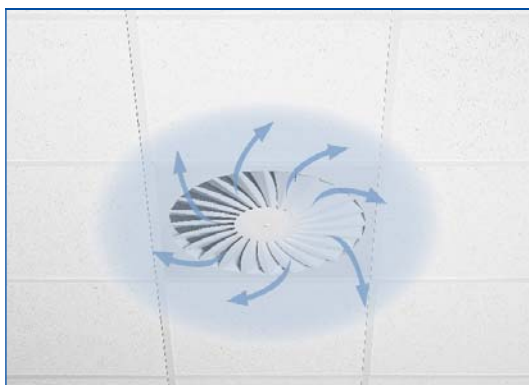

Order code

TDF-SA

TDF-SA – Q – Z – H – M – L / 500 / P1 – RAL ...

1

2

3

4

5

6

7

8

1 Type

TDF-SA Swirl diffuser

2 Construction style

R Circular

Q Square

3 System

Z Supply air

A Extract air

4 Connection

H Horizontal

V Vertical

X Flexible plenum box FLEXTRO
(Only for nominal sizes 600 and 625)

5 Damper blade for volume flow rate balancing

Included with connection X

No entry: without damper blade

M With damper blade

MN With cords and pressure tap
(only horizontal connection)

6 Accessories

Connection X includes a double lip seal

No entry: without accessories

L With lip seal

7 Nominal size [mm]

300

400

500

600

625

8 Exposed surface

No entry: powder-coated RAL 9010,
pure white

P1 Powder-coated,
specify RAL CLASSIC colour

Gloss level

RAL 9010 50 %

RAL 9006 30 %

All other RAL colours 70 %

Order example

TDF-SA-Q-Z-V-M-L/500/P1-RAL 9016

Construction style	Square
System	Supply air
Connection	Vertical
Damper blade for volume flow rate balancing	With
Accessories	Lip seal
Nominal size	500
Exposed surface	RAL 9016, traffic white, gloss level 70 %

TDF-SA-Q-Z-H (supply air)

Quick sizing tables provide a good overview of the volume flow rates and corresponding sound power levels and differential pressures.

The minimum volume flow rates apply to a supply air to room air temperature difference of -6 K.

The maximum volume flow rates apply to a sound power level of approx. 50 dB (A) with damper blade position 0°.

Exact values for all parameters can be determined with our Easy Product Finder design programme.

Quick sizing – sound power level and total differential pressure

Nominal size	\dot{V}		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
300	10	36	1	<15	1	<15	2	<15
	35	126	14	27	16	26	29	26
	60	216	40	40	46	39	86	41
	80	288	71	50	83	49	153	53
400	18	65	1	<15	1	<15	3	<15
	65	234	13	24	17	22	34	24
	115	414	40	39	52	39	107	41
	160	576	76	50	101	51	206	52
500	27	97	1	<15	2	<15	5	<15
	80	288	12	23	16	22	47	26
	135	486	34	37	45	37	134	43
	195	702	71	50	95	51	280	56
600, 625	42	151	2	<15	2	<15	5	<15
	115	414	12	23	16	22	39	26
	185	666	32	38	41	36	101	41
	260	936	62	50	82	49	200	52

TDF-SA-R-Z-H (supply air)

Quick sizing – sound power level and total differential pressure

Nominal size	\dot{V}		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
300	10	36	1	<15	1	<15	2	<15
	40	144	17	29	20	28	38	28
	70	252	53	45	63	45	118	45
	80	288	70	50	82	51	154	51
400	18	65	1	<15	1	<15	3	<15
	65	234	12	23	15	22	35	24
	115	414	39	38	45	38	110	41
	160	576	76	50	88	50	212	51
500	27	97	1	<15	2	<15	5	<15
	90	324	15	23	22	24	58	28
	155	558	45	39	65	40	171	45
	201	724	75	50	108	50	287	55
600, 625	42	151	2	<15	2	<15	5	<15
	130	468	16	26	21	25	50	30
	215	774	43	41	56	40	137	46
	265	954	65	50	86	48	208	53

1 TDF-SA-*-Z-V
(supply air)

Quick sizing – sound power level and total differential pressure

Nominal size	\dot{V}		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
300	10	36	1	<15	1	<15	2	<15
	35	126	14	26	16	25	29	25
	60	216	40	40	46	39	85	40
	80	288	71	50	83	50	153	51
400	18	65	1	<15	1	<15	3	<15
	65	234	12	23	16	25	35	24
	115	414	39	39	50	40	110	42
	155	558	71	50	91	51	200	53
500	27	97	1	<15	2	<15	5	<15
	80	288	12	23	16	25	46	28
	130	468	31	37	42	39	121	44
	180	648	59	50	81	53	232	55
600, 625	42	151	2	<15	2	<15	5	<15
	115	414	13	26	19	28	42	32
	185	666	35	41	48	44	108	48
	230	828	54	49	74	52	166	57

TDF-SA-*-Z-X
(supply air)

Quick sizing – sound power level and total differential pressure

Nominal size	\dot{V}		Damper blade position					
			0°		45°		90°	
			Δp_t	L_{WA}	Δp_t	L_{WA}	Δp_t	L_{WA}
	l/s	m³/h	Pa	dB(A)	Pa	dB(A)	Pa	dB(A)
600, 625	42	151	2	<15	3	<15	5	<15
	125	450	18	25	28	26	47	30
	205	738	49	39	75	41	128	45
	285	1026	95	50	144	53	247	56




TDF-SA-Q-Z

– Q –

Order code detail

Diffuser face TDF-SA-Q

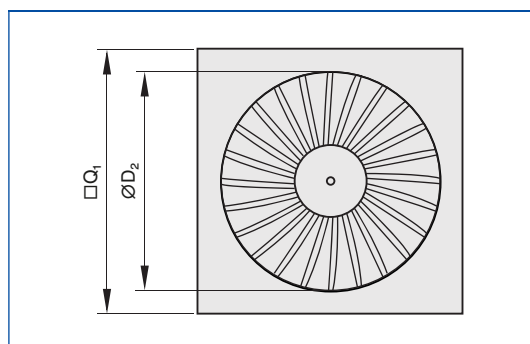

Dimensions

Nominal size	□Q ₁	ØD ₂	A _{eff}
	mm		m ²
300	298	254	0.0108
400	398	336	0.0193
500	498	440	0.0280
600	598	530	0.0400
625	623	530	0.0400

TDF-SA-Q-* -H

– Q – * – H –

Order code detail

Variant

- Ceiling swirl diffuser with square diffuser face
- With plenum box for horizontal duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Square diffuser face
- Plenum box for horizontal duct connection
- Square opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Pressure tap and cord-operated damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Square diffuser face with plenum box
for horizontal duct connection

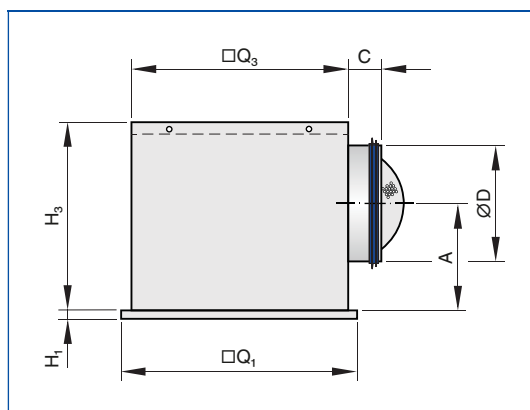

Dimensions [mm] and weight [kg]

Nominal size	□Q ₁	H ₁	□Q ₃	H ₃	ØD	A	C	Plenum box	m
	mm								kg
300	298	8	290	250	158	139	50	AK-Uni-001	4.0
400	398	8	372	295	198	164	50	AK-Uni-002	6.2
500	498	8	476	295	198	164	50	AK-Uni-003	8.5
600	598	8	567	345	248	199	48	AK-Uni-004	11.6
625	623	8	567	345	248	199	48	AK-Uni-004	11.9

Weights apply to the supply air variant

TDF-SA-Q-* -V

– Q – * – V –

Order code detail

Variant

- Ceiling swirl diffuser with square diffuser face
- With plenum box for vertical duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Square diffuser face
- Plenum box for vertical duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Square diffuser face with plenum box for vertical duct connection

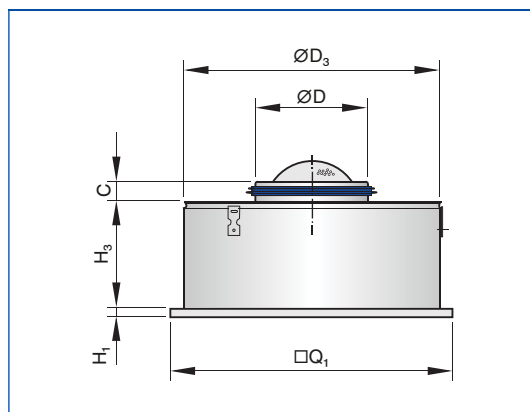

Dimensions [mm] and weight [kg]

Nominal size	□Q ₁	H ₁	ØD ₃	H ₃	ØD	C	m
	mm						kg
300	298	8	275	200	158	50	3.0
400	398	8	364	200	198	50	4.7
500	498	8	462	200	198	50	6.7
600	598	8	559	200	248	48	8.9
625	623	8	559	200	248	48	9.2

Weights apply to the supply air variant

TDF-SA-Q-* -X

– Q – * – X –

Order code detail

Variant

- Ceiling swirl diffuser with square diffuser face
- With flexible plenum box FLEXTRO

Nominal sizes

- 600, 625


Parts and characteristics

- Square diffuser face
- Flexible plenum box FLEXTRO
- Square opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Damper blade for volume flow rate balancing, can be set in 15° intervals between 0 and 90°
- Spigot with double lip seal
- Simple installation of the diffuser face due to central fixing screw with decorative cap

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with double lip seal

Square diffuser face with flexible plenum box FLEXTRO

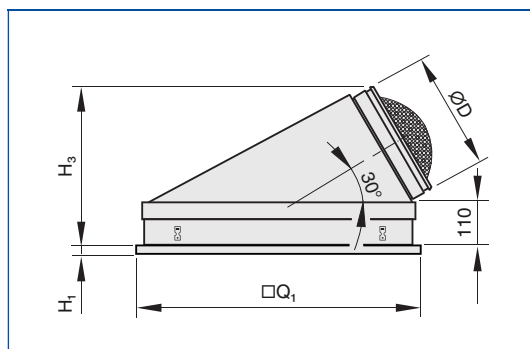

Dimensions [mm] and weight [kg]

Nominal size	□Q ₁	H ₁	H ₃	ØD	Plenum box	m
	mm					kg
600	598	8	365	248	FLEXTRO-Q-*	7.4
625	623	8	365	248	FLEXTRO-Q-*	7.7

Weights apply to the supply air variant




TDF-SA-R-Z/600

– R –

Order code detail

Diffuser face TDF-SA-R

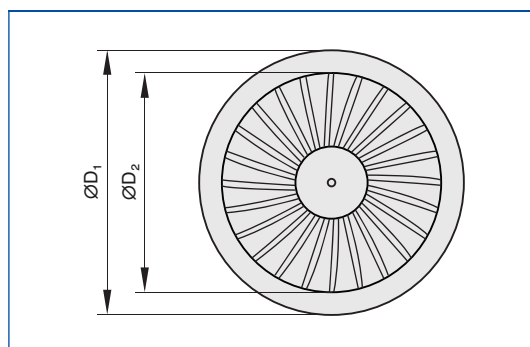

Dimensions

Nominal size	ØD ₁	ØD ₂	A _{eff}
	mm		m ²
300	300	254	0.0108
400	400	336	0.0193
500	500	440	0.0280
600	600	530	0.0400
625	625	530	0.0400

TDF-SA-R-* - H

– R – * – H –

Order code detail

Variant

- Ceiling swirl diffuser with circular diffuser face
- With plenum box for horizontal duct connection

Nominal sizes

- 300, 400, 500, 600, 625

Parts and characteristics


- Circular diffuser face
- Plenum box for horizontal duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Pressure tap and cord-operated damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

1

Circular diffuser face with plenum box
for horizontal duct connection

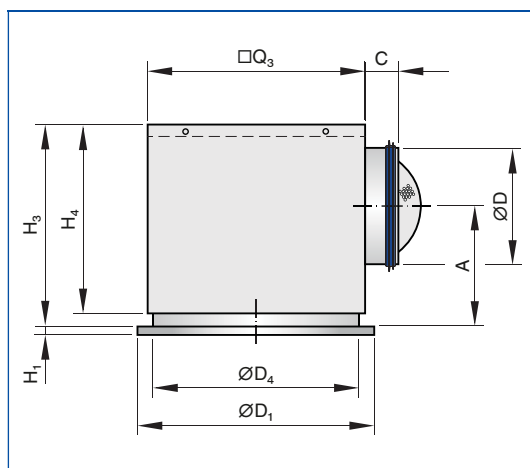

Dimensions [mm] and weight [kg]

Nominal size	ØD ₁	H ₁	□Q ₃	H ₃	ØD ₄	H ₄	ØD	A	C	Plenum box	m
											kg
300	300	8	290	285	278	250	158	174	50	AK-Uni-013	4.2
400	400	8	372	330	362	295	198	199	50	AK-Uni-014	6.5
500	500	8	476	330	460	295	198	199	50	AK-Uni-015	9.0
600	600	8	567	380	557	345	248	234	48	AK-Uni-016	12.3
625	625	8	567	380	557	345	248	234	48	AK-Uni-016	12.5

Weights apply to the supply air variant

TDF-SA-R-*V

– R – * – V –

Order code detail

Variant

- Ceiling swirl diffuser with circular diffuser face
- With plenum box for vertical duct connection

Nominal sizes

- 300, 400, 500, 600, 625


Parts and characteristics

- Circular diffuser face
- Plenum box for vertical duct connection
- Circular opening to accommodate the diffuser face
- Equalising element that ensures a uniform airflow through the diffuser face (supply air variant)
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Damper blade for volume flow rate balancing (optional)
- Lip seal (optional)

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with groove for lip seal (if accessory lip seal has been ordered)

Circular diffuser face with plenum box for vertical duct connection

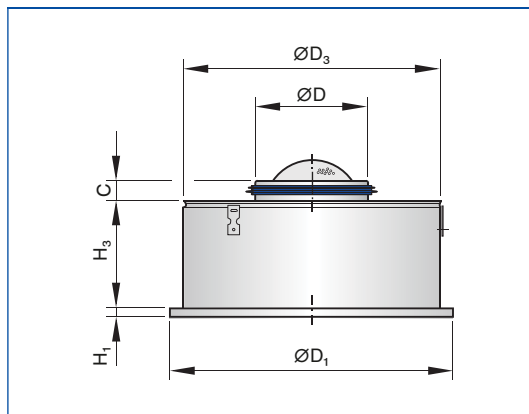

Dimensions [mm] and weight [kg]

Nominal size	ØD ₁	H ₁	ØD ₃	H ₃	ØD	C	m
	mm						kg
300	300	8	275	200	158	50	2.8
400	400	8	364	200	198	50	4.4
500	500	8	462	200	198	50	6.3
600	600	8	559	200	248	48	8.5
625	625	8	559	200	248	48	8.7

Weights apply to the supply air variant

TDF-SA-R-* -X

– R – * – X –

Order code detail

Variant

- Ceiling swirl diffuser with circular diffuser face
- With flexible plenum box FLEXTRO

Nominal sizes

- 600, 625


Parts and characteristics

- Circular diffuser face
- Flexible plenum box FLEXTRO
- Circular opening to accommodate the diffuser face
- Damper blade for volume flow rate balancing, can be set in 15° intervals between 0 and 90°
- Simple installation of the diffuser face due to central fixing screw with decorative cap
- Spigot with double lip seal

Construction features

- Spigot suitable for circular ducts to EN 1506 or EN 13180
- Spigot with double lip seal

Circular diffuser face with flexible plenum box FLEXTRO/600

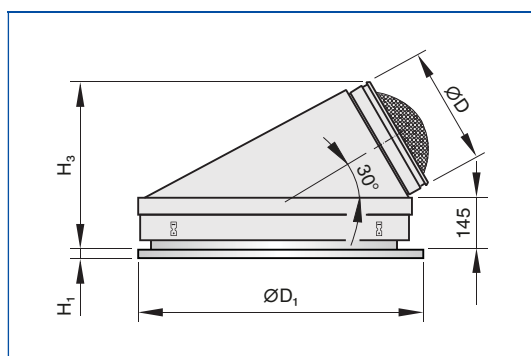

Dimensions [mm] and weight [kg]

Nominal size	ØD ₁	H ₁	H ₃	ØD	Plenum box	m
						kg
600	600	8	400	248	FLEXTRO-R-*/600	7.0
625	625	8	400	248	FLEXTRO-R-*/600	7.2


Weights apply to the supply air variant

Installation types


For more installation details see Chapter K1 – 1.6.

These are only schematic diagrams to illustrate installation details.


Flush ceiling installation with square plenum box

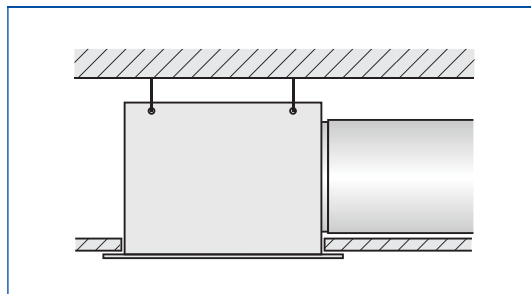

Flush ceiling installation with plenum box FLEXTRO

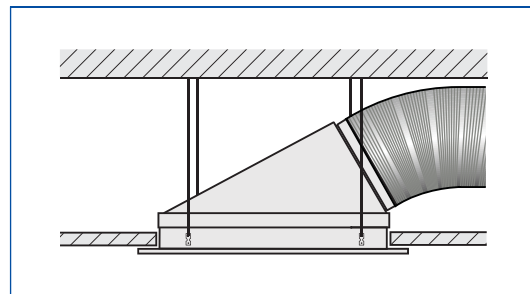


Freely suspended installation

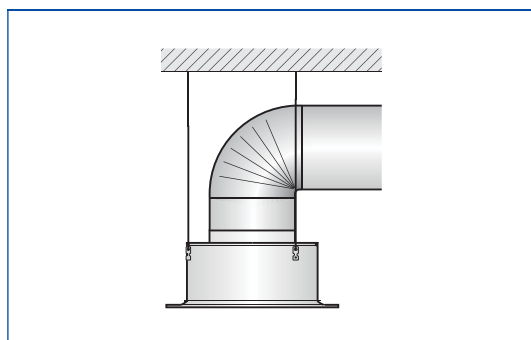


Ceiling systems


Grid ceiling



Continuous ceiling




T-bar ceiling




Diffuser face sealing and fixing

Diffuser face – sealing

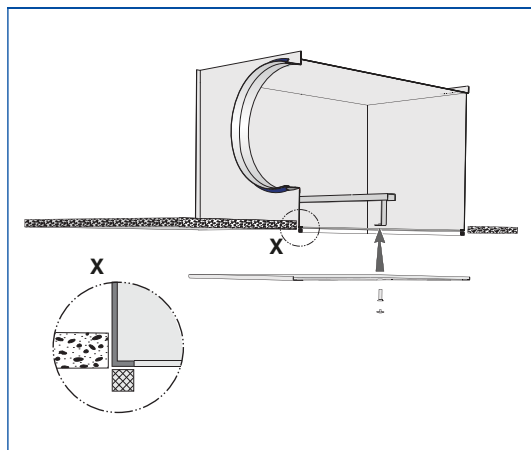

Diffuser face – central screw fixing

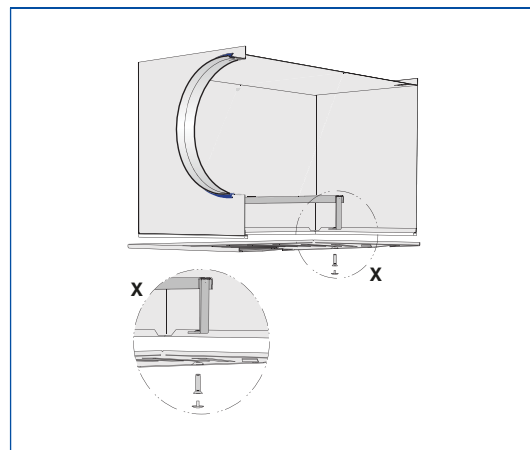

Standard text

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design programme.

Ceiling swirl diffusers with square or circular diffuser face. Supply air and extract air variants for comfort zones. Diffuser face with fixed air control blades for horizontal swirling supply air discharge creating high induction levels. For installation into all types of suspended ceilings.

Ready-to-install component which consists of the diffuser face and a plenum box, side entry or top entry spigot, and suspension holes or suspension lugs.

The diffuser face is fixed to the cross bar with a central screw.

Spigot suitable for ducts to EN 1506 or EN 13180.

Sound power level of the air-regenerated noise measured according to EN ISO 5135.

Special characteristics

- Very low sound power level, ideal for comfort zones
- Fixed blades
- For all types of ceiling systems, and with an extended border also suitable for freely suspended installation
- Horizontal or vertical duct connection

Materials and surfaces

- Diffuser face made of galvanised sheet steel
- V, H: Plenum box and cross bar made of galvanised sheet steel
- X: Plenum box made of plastic and galvanised sheet steel
- Lip seal made of rubber
- Diffuser face powder-coated RAL 9010, pure white
- P1: Powder-coated, RAL CLASSIC colour

Technical data

- Nominal sizes: 300, 400, 500, 600, 625 mm
- Minimum volume flow rate, with $\Delta t_z = -6$ K: 10 – 42 l/s or 36 – 151 m³/h
- Maximum volume flow rate, with $L_{WA} \approx 50$ dB(A): 80 – 285 l/s or 288 – 1026 m³/h
- Supply air to room air temperature difference: -12 to +10 K

Sizing data

- \dot{V} _____ [m³/h]
- Δp_t _____ [Pa]
- L_{WA} Air-regenerated noise _____ [dB(A)]

Order options

1 Type

TDF-SA Swirl diffuser

2 Construction style

- ☐ **R** Circular
- ☐ **Q** Square

3 System

- ☐ **Z** Supply air
- ☐ **A** Extract air

4 Connection

- ☐ **H** Horizontal
- ☐ **V** Vertical
- ☐ **X** Flexible plenum box FLEXTRO (Only for nominal sizes 600 and 625)

5 Damper blade for volume flow rate balancing

Included with connection X

No entry: without damper blade

- ☐ **M** With damper blade
- ☐ **MN** With cords and pressure tap (only horizontal connection)

6 Accessories

Connection X includes a double lip seal

No entry: without accessories

- ☐ **L** With lip seal

7 Nominal size [mm]

- ☐ **300**
- ☐ **400**
- ☐ **500**
- ☐ **600**
- ☐ **625**

8 Exposed surface

No entry: powder-coated RAL 9010, pure white

- ☐ **P1** Powder-coated, specify RAL CLASSIC colour

Gloss level

RAL 9010 50 %

RAL 9006 30 %

All other RAL colours 70 %

Ceiling diffusers

Basic information and nomenclature



- Product selection
- Principal dimensions
- Nomenclature
- Sizing and sizing example
- Installation information
- Commissioning

Ceiling diffusers

Basic information and nomenclature

Product selection

	Ceiling swirl diffusers								
	AIRNAMIC	VDW	TDV-SilentAIR	RFD	FD	TDF-SilentAIR	VD	VDL	FDE
Diffuser face style									
Circular	●	●	●	●	●	●		●	
Square	●						●		●
Diffuser face									
Circular	●	●	●	●	●	●		●	
Square	●	●	●	●	●	●	●		●
Galvanised sheet steel		●	●	●	●	●		●	●
Aluminium				●			●		
Plastic	●								
Air control blades									
Fixed	●			●	●	●			●
Adjustable		●	●				●	●	
Plastic, black and white		●	●						
Duct connection									
Horizontal	●	●	●	●	●	●	●	●	●
Vertical		●	●	●	●	●	●	●	
FLEXTRO	●	●	●		●	●			
Attachments									
Damper blade	●	●	●	●	●	●			●
Pressure tap		●	●	●	●	●			●
Actuator							●	●	
Accessories									
Lip seal	●	●	●	●	●	●			●
Protective cage							●	●	
Extended border							●	●	
Nominal sizes									
Circular diffuser face	400, 600	300, 400, 500, 600, 625	300, 400, 500, 600, 625		300, 400, 500, 600, 625	300, 400, 500, 600, 625			
Square diffuser face	300, 600, 625	300, 400, 500, 600, 625, 825					425, 600, 775, 1050		600, 625
Spigot*				125, 160, 200, 250, 315, 400				315, 400, 630, 800	250, 315
Technical data									
Volume flow rate range [l/s]	13 – 385	7 – 470	11 – 315	4 – 330	9 – 235	10 – 295	95 – 1490	65 – 1080	51 – 365
Volume flow rate range [m³/h]	47 – 1386	25 – 1692	40 – 1134	14 – 1188	31 – 846	36 – 1026	342 – 5364	234 – 3888	184 – 1314
Supply air to room air temperature difference	-12 – +10 K						-12 – +15 K		-12 – +10 K
●	Possible								
	Not possible								

*Nominal diameter

Ceiling diffusers

Basic information and nomenclature

Product selection

1

	Design ceiling swirl diffusers		Ceiling swirl diffusers with perforated face plate
	XARTO	ADD	DCS
Diffuser face style			
Circular	●	●	●
Square	●		●
Diffuser face			
Circular	●	●	
Square	●	●	●
Galvanised sheet steel	●	●	●
Aluminium			
Plastic			
Air control blades			
Fixed	●	●	●
Adjustable			
Plastic, black and white			
Duct connection			
Horizontal	●	●	●
Vertical		●	●
FLEXTRO			
Attachments			
Damper blade	●	●	
Pressure tap		●	
Actuator			
Accessories			
Lip seal	●	●	
Protective cage			
Extended border			
Nominal sizes			
Circular diffuser face	600	250, 300, 450, 500, 600	
Square diffuser face	600, 625	250, 300, 450, 500, 600, 625	600, 625
Spigot*		125, 160, 200, 250, 315	125, 160, 200, 250, 315, 400
Technical data			
Volume flow rate range [l/s]	31 – 265	20 – 465	4 – 260
Volume flow rate range [m³/h]	110 – 954	72 – 1674	16 – 936
Supply air to room air temperature difference	–12 – +10 K		
●	Possible		
	Not possible		

*Nominal diameter

Ceiling diffusers

Basic information and nomenclature

Product selection

	Ceiling diffusers						
	VDR	ADLQ	DLQ	ADLR	DLQL	DLQ-AK	DLK-Fb
Diffuser face style							
Circular	●			●			
Square		●	●		●	●	●
Diffuser face							
Circular	●			●			
Square		●	●	●	●	●	●
Galvanised sheet steel			●		●	●	●
Aluminium	●	●		●			
Plastic							
Air control blades							
Fixed		●	●	●	●	●	●
Adjustable	●						
Plastic, black and white							
Duct connection							
Horizontal	●	●	●	●	●	●	●
Vertical	●			●	●		
FLEXTRO		●					
Attachments							
Damper blade		●	●	●	●		
Pressure tap		●	●	●			
Actuator	●						
Accessories							
Lip seal		●	●	●	●		
Protective cage							
Extended border							
Nominal sizes							
Circular diffuser face	630, 800			244, 300, 356, 412, 468, 542, 598, 654			
Square diffuser face		250, 300, 400, 500, 600, 625	250, 300, 400, 500, 600, 625	600 625	250, 300, 400, 500, 600	300, 400, 500, 600, 625	600, 625
Spigot*	315, 400, 630, 800						
Technical data							
Volume flow rate range [l/s]	175 – 1495	20 – 665	20 – 700	20 – 650	6 – 285	40 – 565	220 – 460
Volume flow rate range [m³/h]	630 – 5382	72 – 2394	72 – 2520	72 – 2340	22 – 1026	144 – 2034	792 – 1656
Supply air to room air temperature difference	–10 to +15 K	–10 to +10 K					
●	Possible						
	Not possible						

*Nominal diameter

Ceiling diffusers

Basic information and nomenclature

Principal dimensions

$\varnothing D$ [mm]

Outside diameter of the spigot

$\varnothing D_1$ [mm]

Outer diameter of a circular diffuser face

$\varnothing D_2$ [mm]

Diameter of a circular diffuser face style

$\varnothing D_3$ [mm]

Diameter of a circular plenum box

$\square Q_1$ [mm]

Outer diameter of a square diffuser face

$\square Q_2$ [mm]

Dimensions of a square diffuser face style

$\square Q_3$ [mm]

Dimensions of a square plenum box

H_1 [mm]

Distance (height) from the lower edge of the suspended ceiling to the lower edge of the diffuser face

H_2 [mm]

Height of a ceiling diffuser, from the lower edge of the suspended ceiling to the upper edge of the spigot

H_3 [mm]

Height of a ceiling diffuser with plenum box, from the lower edge of the suspended ceiling to the upper edge of the plenum box or of the spigot

A [mm]

Position of the spigot, defined by the distance of the spigot centre line to the lower edge of the suspended ceiling

C [mm]

Length of the spigot

m [kg]

Weight

Nomenclature

L_{WA} [dB(A)]

A-weighted sound power level of air-regenerated noise

\dot{V} [m³/h] and [l/s]

Volume flow rate

Δt_z [K]

Supply air temperature difference

Δp_t [Pa]

Total differential pressure

A_{eff} [m²]

Effective air discharge area

All sound power levels are based on 1 pW.

Basic information and nomenclature

1

This catalogue provides convenient quick sizing tables for ceiling diffusers. The tables give supply air volume flow rates for all nominal sizes. The maximum volume flow rates are for an open damper blade. A smaller opening of the damper blade results in higher sound power levels and a higher total differential pressure. The tables show values for damper blade positions 45° and 90°.

Sizing data for other volume flow rates and damper blade positions can be determined quickly and precisely using the Easy Product Finder design programme.

Sizing example

Given data

$\dot{V} = 300 \text{ l/s (1280 m}^3\text{/h)}$
 Square ceiling diffuser, steel,
 with fixed air control blades
 Maximum sound power level 40 dB(A)
 with damper blade position 45°
 Four-way air discharge

Quick sizing


Type DLQ
Nominal sizes: 600, 625
Selected: DLQ/600

Easy Product Finder



The Easy Product Finder allows you to size products using your project-specific data.

You will find
the Easy Product Finder
on our website.

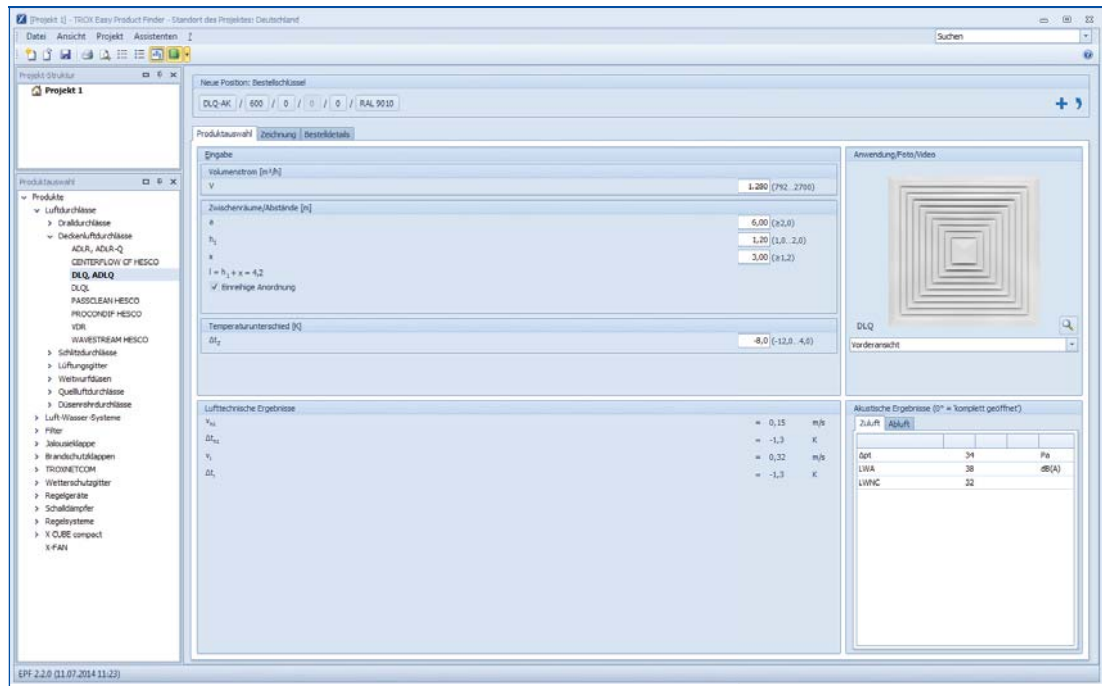

Ceiling diffusers

Basic information and nomenclature

Description


Installation information

- Installation and making connections to be performed by others
- The optimum aerodynamic function is only achieved with flush ceiling installation
- The diffuser face is fixed to the plenum box cross bar using the central fixing screw
- Central fixing screw is concealed by a decorative cap

1


Installation types

Flush ceiling installation with square plenum box

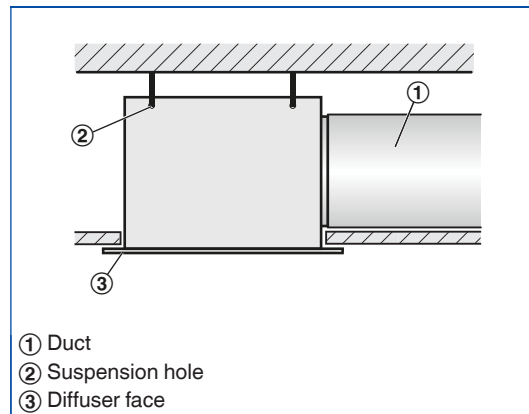


- Horizontal duct connection
- Four suspension holes
- Suspension with cords, wires or hangers, to be provided by others

Flush ceiling installation with circular plenum box

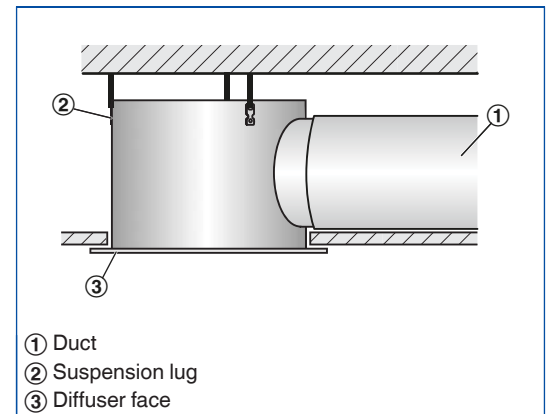


- Horizontal duct connection
- Three suspension lugs
- Suspension with cords, wires or hangers, to be provided by others

Flush ceiling installation with plenum box FLEXTRO

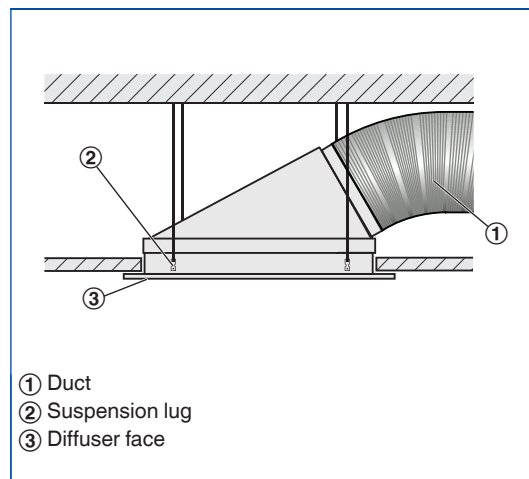

- Spigot at 30° angle
- Four suspension lugs
- Suspension with cords, wires or hangers, to be provided by others

Freely suspended installation

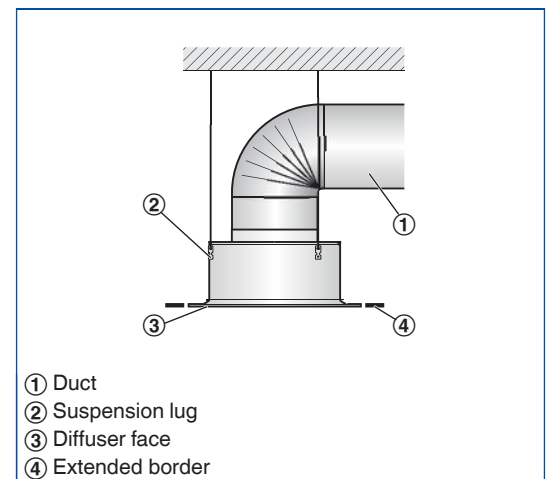

- Vertical duct connection
- Three suspension lugs
- Suspension with cords, wires or hangers, to be provided by others


Ceiling diffusers

Basic information and nomenclature

1


Installation without plenum box

Flush ceiling installation with standard cross bar G1, screw-fixed to ceiling

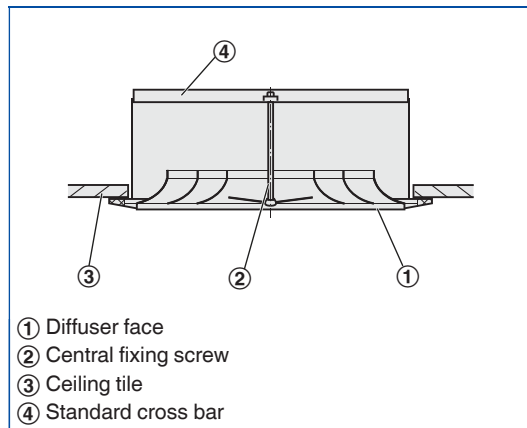


- No spigot
- Fixing of the standard cross bar to the ceiling tile is to be performed by others

Flush ceiling installation with standard cross bar G1, with fixing tabs mortared in

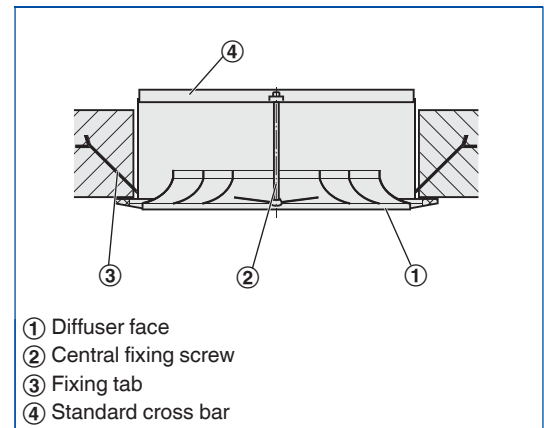

- No spigot
- The standard cross bar has to be mortared into the ceiling by others


Flush ceiling installation with duct cross bar E1

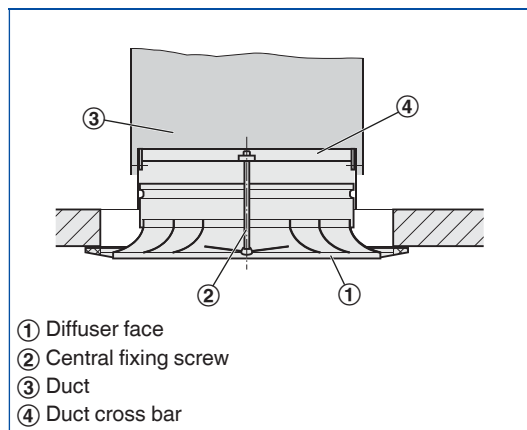

- Vertical duct connection
- Fixing of the duct cross bar to the duct is to be performed by others


Ceiling systems

Installation into grid ceilings

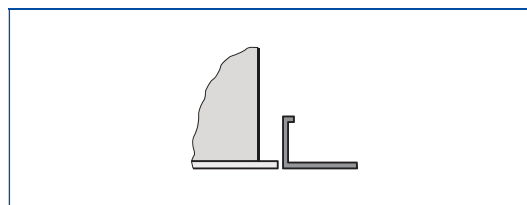


- Fix the plenum box to the ceiling
- The ceiling tile of the grid ceiling is independent of the ceiling diffuser
- Fix the diffuser face after the ceiling has been completed

Installation in continuous ceilings

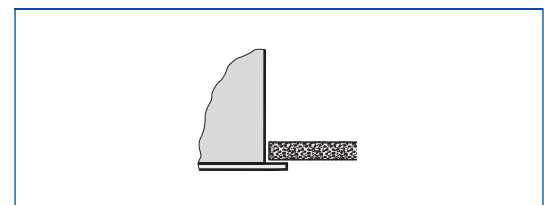


- Fix plenum box (including diffuser face, if necessary) to the ceiling
- Adjust plasterboard ceiling tile as required
- If necessary, fix the diffuser face after the ceiling has been completed

Installation in T-bar ceilings

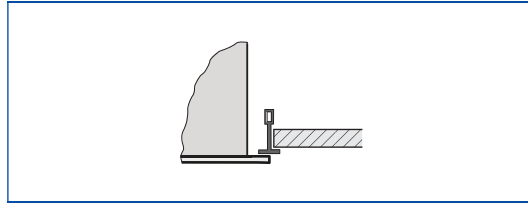

- Fix the plenum box to the ceiling
- The T-bar ceiling is independent of the ceiling diffuser
- Fix the diffuser face below the T-bars after the ceiling has been completed


Installation in T-bar ceilings, diffuser face rests on T-bars

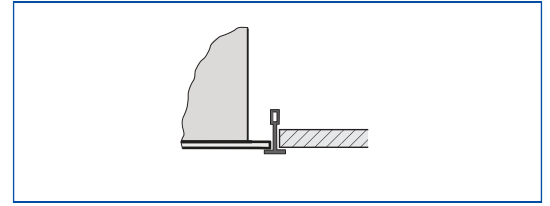

- Fix the plenum box to the ceiling, if necessary
- The diffuser rests on the T-bars

Diffuser face sealing and fixing


Diffuser face – sealing

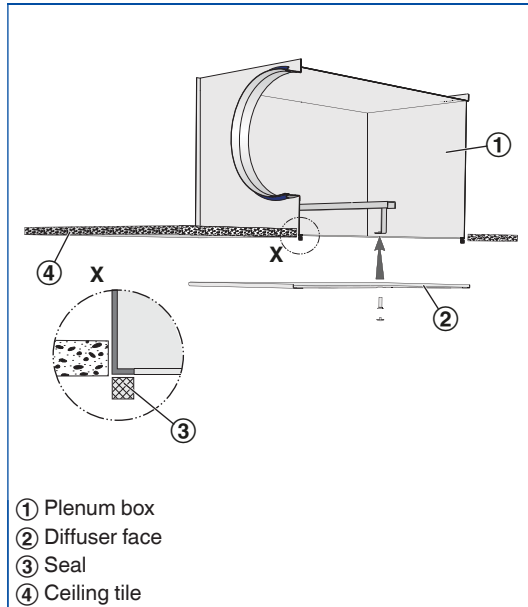

- ① Plenum box
- ② Diffuser face
- ③ Seal
- ④ Ceiling tile

- The self-adhesive sealing tape (supplied) has to be applied to the return edges of the plenum box by others

Diffuser face – central screw fixing

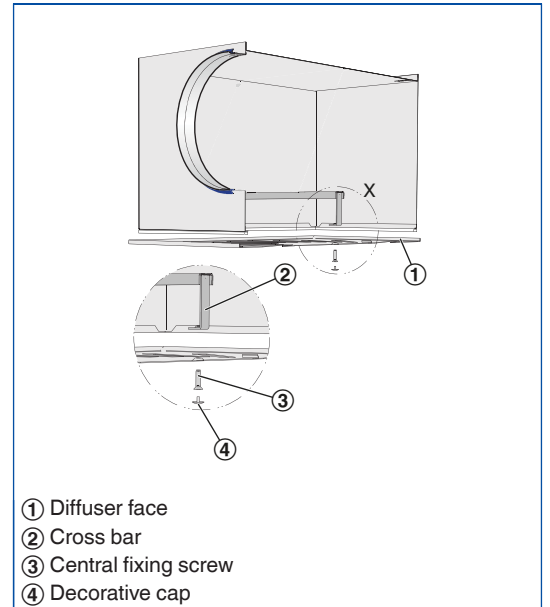

- ① Diffuser face
- ② Cross bar
- ③ Central fixing screw
- ④ Decorative cap

- Using the central fixing screw, fix the diffuser face to the cross bar of the plenum box
- Attach the decorative cap

Ceiling diffusers

Basic information and nomenclature


Commissioning

Volume flow rate balancing

When several diffusers are connected to just one volume flow controller, it may be necessary to balance the volume flow rates.


- AIRNAMIC, XARTO, FLEXTRO:
The diffuser face can be removed to access the damper blade; the damper blade can then be set in 15° intervals between 0 and 90°
- Ceiling diffusers with universal plenum box and damper blade (variant -M):
The diffuser face can be removed to access the damper blade; the damper blade can then be set to any position between 0 and 90°
- Ceiling diffusers with universal plenum box, damper blade and pressure tap (variant -MN):
The diffuser face need not be removed since the damper blade can be set with two cords (white and green).

AK-Uni-...-MN Volume flow rate balancing

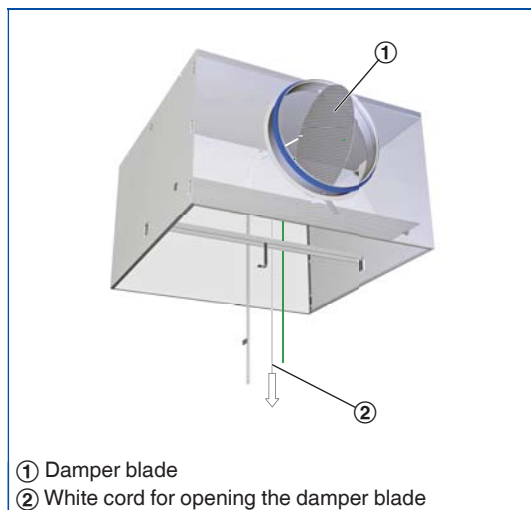


Open, 0°

AK-Uni-...-MN Volume flow rate balancing

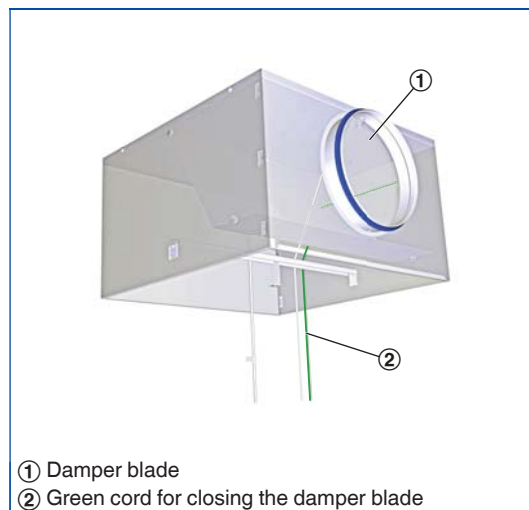


Closed, 90°

AIRNAMIC, XARTO, FLEXTRO Volume flow rate balancing

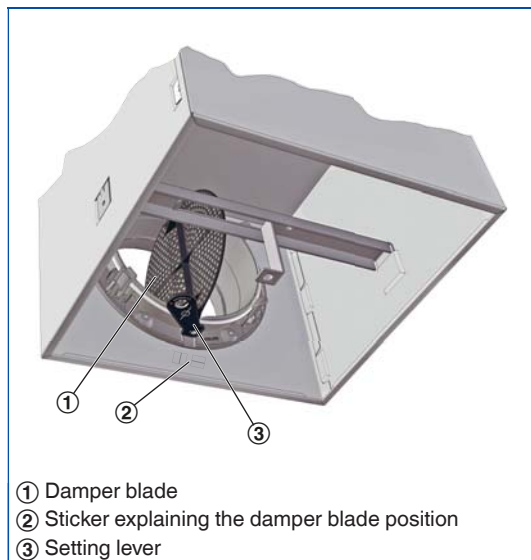

Open, 0°

AIRNAMIC, XARTO, FLEXTRO Volume flow rate balancing

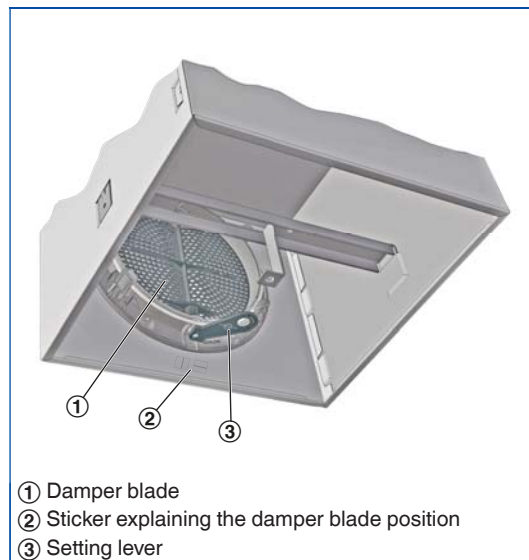

Closed, 90°


Volume flow rate measurement

Ceiling diffusers with universal plenum box, damper blade and pressure tap (variant -MN) allow for volume flow rate balancing even with the diffuser face in place.

- Connect the measuring tube to the digital manometer
- Read the effective pressure
- Read the volume flow rate off the characteristic or calculate it
- If necessary, adjust the damper blade position with the cords

A characteristic is included with each AK-Uni plenum box.

AK-Uni-...-MN volume flow rate measurement

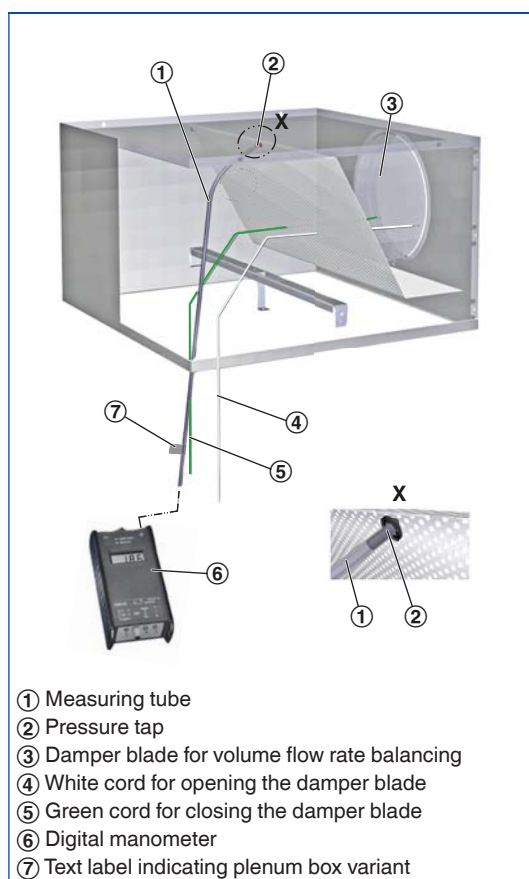

For K values for the AK-Uni plenum boxes refer to Chapter K1 – 1.5.

Volume flow rate calculation for air density 1.2 kg/m³

$$\dot{V} = C \times \sqrt{\Delta p_w}$$

Volume flow rate calculation for other air densities

$$\dot{V} = C \times \sqrt{\Delta p_w} \times \sqrt{\frac{1.2}{\rho}}$$