

AIRFOIL



GRILLES
DUCT
FITTINGS

making it happen sooner...



Quality
Endorsed
Company
ISO 9001
 SAI GLOBAL

**COMMERCIAL CIRCULAR
DIFFUSER
CCD150**





COMMERCIAL CIRCULAR DIFFUSER **CCD150**

PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Commercial Circular Diffuser (CCD150) is crafted from high-grade lightweight spun aluminium material, offering durability and style. Designed for flush ceiling-mounted applications, this modern and sleek diffuser adds a touch of sophistication to any space. The CCD150 is a multi-coned Supply Air Diffuser suitable for both heating and cooling purposes.

For exposed ceiling applications, the CCD150 can be conveniently fitted directly into Airfoil's Supply Air Cushion Box (ICB) using an accompanying matching Metal Spigot Collar. Alternatively, the product comes complete with optional Fixing Clips and a Butterfly Damper for easy installation into a plasterboard ceiling.

Additionally, the diffuser features a removable core center that can be easily rotated anti-clockwise for quick removal, allowing for straightforward installation of flexible duct directly to the neck of the diffuser.

Available in 5 sizes and offered in our standard white range, the CCD150 can also be powder-coated to any specified colour upon request. This versatile product is suitable for a variety of commercial applications, including shopping centres, shop fit-outs, airports, cinemas, restaurants, food courts, universities, and any other commercial settings where variable air patterns are required.

COMMERCIAL CIRCULAR DIFFUSER CCD150


PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – CCD150**
- Constructed from high-grade light weight spun aluminium
- Neck size 150mm to suit 150mm diameter flexible duct attachment
- Face Size 260mm
- Frame depth 75mm
- Cut out size 215mm
- Used for supply air heating and cooling applications
- Capable of handling high airflow rates
- Ideal for flush ceiling mounted or exposed duct work applications
- Available with optional fixing clips for mounting
- Comes with optional Butterfly Damper for air balancing
- Available in our standard white range
- Special powder-coated colours available on request
- Optional Supply Air Cushion Box (ICB) to suit CCD150 diffuser
- Product suitable for a variety of commercial applications such as shopping centres, shop fit-outs, airports, cinemas, restaurants, food courts, universities or in any commercial application where variable air patterns are required
- Airfoil tested information available



COMMERCIAL CIRCULAR DIFFUSER CCD150

CROSS SECTIONAL DIAGRAM

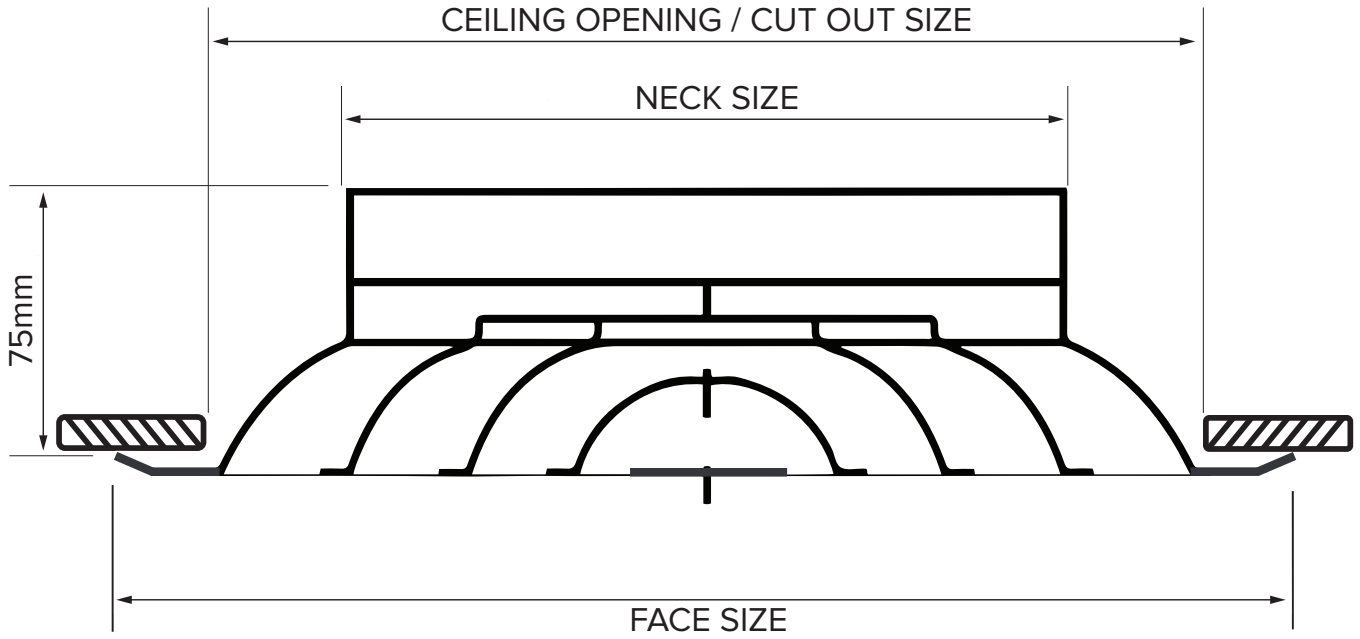

DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.

COMMERCIAL CIRCULAR DIFFUSER CCD150

PERFORMANCE DATA

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD150	Lit/sec	30	45	60	75	90	100
	NR	<20	<20	25	30	35	40
	Tot. Press (Pa)	4	10	18	28	42	52
	Rad. of diffusion/m (throw)	1	1.5	2.1	2.3	3.3	3.7

COMMERCIAL CIRCULAR DIFFUSER - OPTIONAL SIZES

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD150	Lit/sec	30	45	60	75	90	100
	NR	<20	<20	25	30	35	40
	Tot. Press (Pa)	4	10	18	28	42	52
	Rad. of diffusion/m (throw)	1	1.5	2.1	2.3	3.3	3.7

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD200	Lit/sec	55	80	105	135	160	190
	NR	<20	<20	28	34	39	42
	Tot. Press (Pa)	5	12	19	31	44	60
	Rad. of diffusion/m (throw)	1.4	2.1	2.8	3.7	4.4	5

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD250	Lit/sec	85	130	175	220	265	305
	NR	<20	25	32	37	41	44
	Tot. Press (Pa)	5	12	21	33	46	62
	Rad. of diffusion/m (throw)	1.8	2.9	3.7	4.8	5.7	6.5

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD300	Lit/sec	125	190	260	325	385	445
	NR	<20	27	33	38	43	47
	Tot. Press (Pa)	6	12	22	34	49	65
	Rad. of diffusion/m (throw)	2.2	3.4	4.5	5.7	6.8	8

Size/Code	Performance Data	Commercial Circular Diffuser					
CCD350	Lit/sec	225	235	450	560	670	780
	NR	25	35	40	45	50	55
	Tot. Press (Pa)	10	22	39	60	85	115
	Rad. of diffusion/m (throw)	3.5	5.4	7	8.8	10.5	12.2