













PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Commercial Circular Diffuser (CCD200) is crafted from high-grade lightweight spun aluminium material, offering durability and style. Designed for flush ceiling-mounted applications, this modern and sleek diffuser adds a touch of sophistication to any space. The CCD200 is a multi-coned Supply Air Diffuser suitable for both heating and cooling purposes.

For exposed ceiling applications, the CCD200 can be conveniently fitted directly into Airfoil's Supply Air Cushion Box (ICB) using an accompanying matching Metal Spigot Collar. Alternatively, the product comes complete with optional Fixing Clips and a Butterfly Damper for easy installation into a plasterboard ceiling.

Additionally, the diffuser features a removable core center that can be easily rotated anticlockwise for quick removal, allowing for straightforward installation of flexible duct directly to the neck of the diffuser.

Available in 5 sizes and offered in our standard white range, the CCD200 can also be powder-coated to any specified colour upon request. This versatile product is suitable for a variety of commercial applications, including shopping centres, shop fit-outs, airports, cinemas, restaurants, food courts, universities, and any other commercial settings where variable air patterns are required.





PRODUCT SPECIFICATIONS AND INFORMATION


- Product ordering code CCD200
- Constructed from high-grade light weight spun aluminium
- Neck size 200mm to suit 200mm diameter flexible duct attachment
- Face Size 310mm
- Frame depth 75mm
- Cut out size 265mm
- Used for supply air heating and cooling applications
- Capable of handling high airflow rates
- Ideal for flush ceiling mounted or exposed duct work applications
- Available with optional fixing clips for mounting
- Comes with optional Butterfly Damper for air balancing
- Available in our standard white range
- Special powder-coated colours available on request
- Optional Supply Air Cushion Box (ICB) to suit CCD200 diffuser
- · Product suitable for a variety of commercial applications such as shopping centres, shop fit-outs, airports, cinemas, restaurants, food courts, universities or in any commercial application where variable air patterns are required
- Airfoil tested information available







CROSS SECTIONAL DIAGRAM

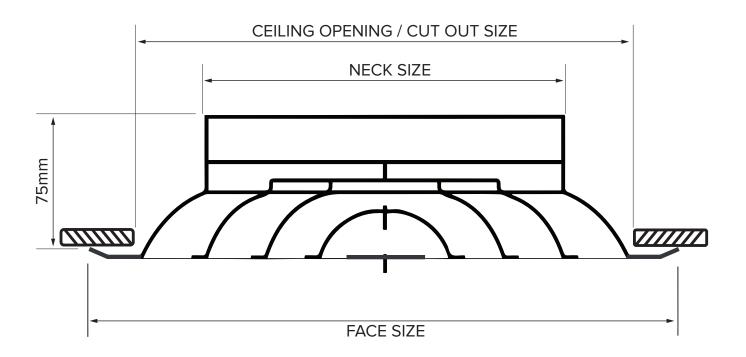



DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.





PERFORMANCE DATA

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD200	Lit/sec	55	80	105	135	160	190	
	NR	<20	<20	28	34	39	42	
	Tot. Press (Pa)	5	12	19	31	44	60	
	Rad. of diffusion/m (throw)	1.4	2.1	2.8	3.7	4.4	5	

COMMERCIAL CIRCULAR DIFFUSER - OPTIONAL SIZES

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD150	Lit/sec	30	45	60	75	90	100	
	NR	<20	<20	25	30	35	40	
	Tot. Press (Pa)	4	10	18	28	42	52	
	Rad. of diffusion/m (throw)	1	1.5	2.1	2.3	3.3	3.7	

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD200	Lit/sec	55	80	105	135	160	190	
	NR	<20	<20	28	34	39	42	
	Tot. Press (Pa)	5	12	19	31	44	60	
	Rad. of diffusion/m (throw)	1.4	2.1	2.8	3.7	4.4	5	

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD250	Lit/sec	85	130	175	220	265	305	
	NR	<20	25	32	37	41	44	
	Tot. Press (Pa)	5	12	21	33	46	62	
	Rad. of diffusion/m (throw)	1.8	2.9	3.7	4.8	5.7	6.5	

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD300	Lit/sec	125	190	260	325	385	445	
	NR	<20	27	33	38	43	47	
	Tot. Press (Pa)	6	12	22	34	49	65	
	Rad. of diffusion/m (throw)	2.2	3.4	4.5	5.7	6.8	8	

Size/Code	Performance Data	Commercial Circular Diffuser						
CCD350	Lit/sec	225	235	450	560	670	780	
	NR	25	35	40	45	50	55	
	Tot. Press (Pa)	10	22	39	60	85	115	
	Rad. of diffusion/m (throw)	3.5	5.4	7	8.8	10.5	12.2	