


AIRFOIL



GRILLES
DUCT
FITTINGS

making it happen sooner...

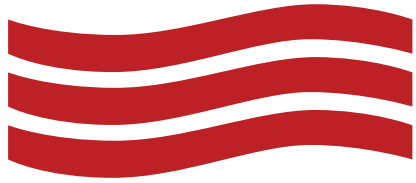

Quality
Endorsed
Company
ISO 9001
 SAI GLOBAL



**FLANGELESS
LINEAR SLOT DIFFUSER
F-LSD25**



FLANGELESS LINEAR SLOT DIFFUSER F-LSD25

PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Australian Made and Designed Flangeless Linear Slot Diffuser (F-LSD25) presents a highly versatile method of air diffusion. Crafted from Airfoils' premium engineered aluminium extrusion profiles, this Flangeless Linear Slot excels in both supply and return applications.

Particularly suited for architectural environments like open ceiling spaces, its sleek and contemporary design adds an exceptional aesthetic touch.

The grille's flangeless outer frame boasts a depth of 50mm, complemented by an internal 12mm fascia, enhancing its Flangeless appeal.

At its core, black interior J Blades are housed within its 19mm T Bar, offering 180-degree adjustable movement. This variability in blades enables customisable airflow patterns, whether vertical or horizontal.

Available in white or in a range of powder-coated colours, this product seamlessly integrates into any commercial or domestic setting where architectural finesse is paramount.

FLANGELESS LINEAR SLOT DIFFUSER F-LSD25


PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – F-LSD25**
- Australian Made and Designed
- Aluminium construction
- Used for supply and return air applications
- Ideal for open ceiling installation purposes
- Manufactured to a maximum length of 2 meters (5 slots max)
- Opening slot size of 25mm
- 12mm internal fascia
- Frame depth 50mm and “T” Bar size of 19mm
- Provides any variable air throw pattern from a vertical or horizontal position
- Ceiling mounted
- Offers clean linear line appearance
- Black “J” Blades are fully adjustable to 180 degrees
- Available in our standard white powder coated range
- Special powder coated colours available on request
- Product suitable for any commercial or domestic setting where architectural finesse is paramount
- Airfoil tested information available
- **The following metric performance data has been derived from exhaustive testing in elaborate laboratories of acoustic and vibrational engineers Louis A. Challis and Associates Proprietary Limited. Darling Street, Sydney 2000**



FLANGELESS LINEAR SLOT DIFFUSER F-LSD25

CROSS SECTIONAL DIAGRAM

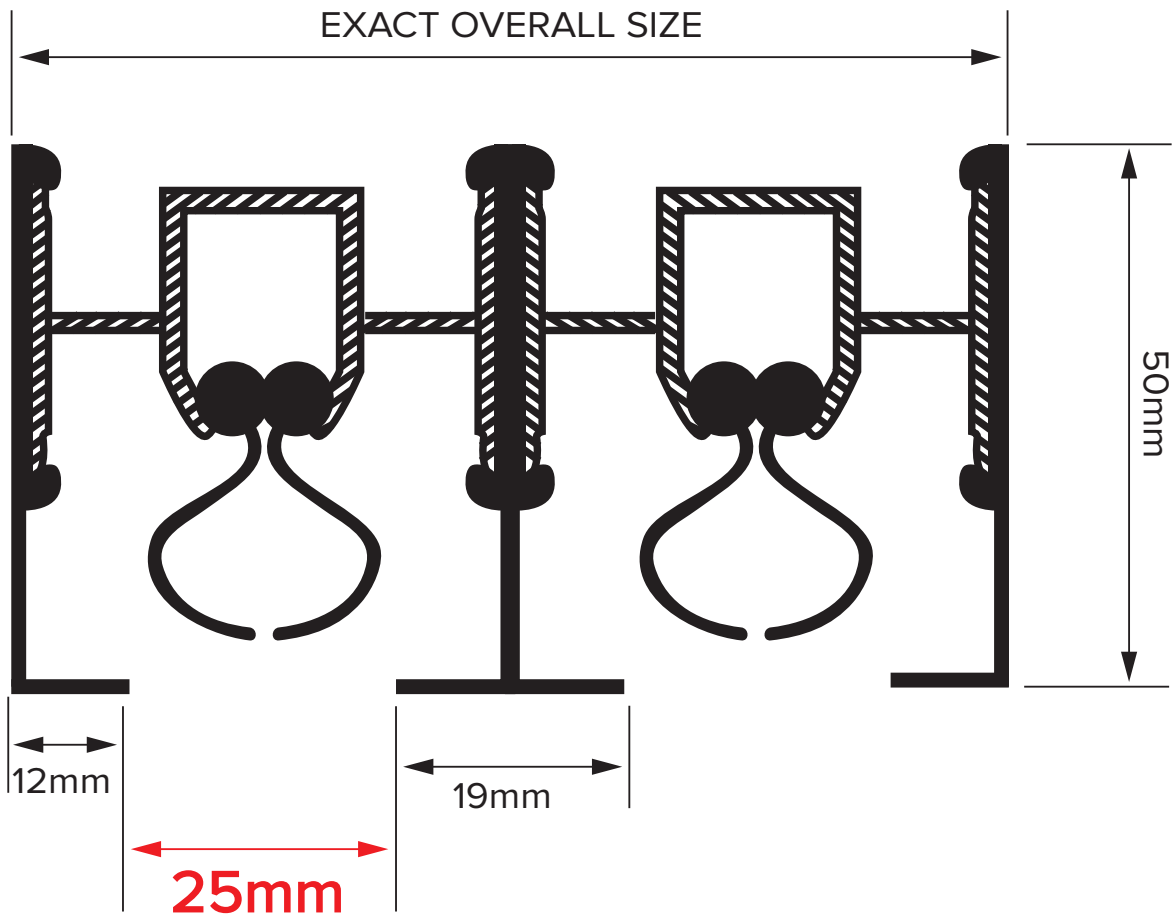

DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.

FLANGELESS LINEAR SLOT DIFFUSER F-LSD25

PERFORMANCE DATA - F-LSD25 SLOT WIDTH SUPPLY APPLICATION

No. Slots	Total Press.	Horiz.	1		4		9		16		24		35		49		62	
	Pascals.	Vert.	1	2	6	10	15	21	29	37								
1	Lit / sec / metre		12		25		37		50		65		75		90		100	
	NR		-		-		16		25		32		37		42		46	
	Throw	Hor.	0.1	1	0.4	3.4	1	4	1.8	4.6	2.8	5.2	3.4	5.8	4.8	6.2	3.8	6.8
	in metres	Vert	0.6		2.4		3.8		4.4		4.6		5.2		5.6		5.8	
2	Lit / sec / metre		25		50		75		100		125		150		175		200	
	NR		-		-		21		30		37		42		47		51	
	Throw	Hor.	0.4	1.8	1	4.6	1.8	5.8	3.4	6.8	4.4	7.4	4.6	8.2	5	8.2	5.6	9.6
	in metres	Vert	1.6		3.4		5		5.8		6.8		7.6		8		8.6	
3	Lit / sec / metre		37		75		115		150		185		225		260		300	
	NR		-		16		24		33		40		45		50		54	
	Throw	Hor.	0.4	3.2	1.2	5.8	3.2	7	4	8.2	5	9.2	5.8	9.8	6.2	10.8	6.8	11.4
	in metres	Vert	2.2		4		6.2		7.4		8.2		8.8		9.8		10.4	
4	Lit / sec / metre		50		100		150		200		250		300		350		400	
	NR		-		13		26		35		42		47		52		56	
	Throw	Hor.	0.6	3.4	1.8	6.8	3.8	8.2	4.6	9.6	6.2	10.4	6.8	11.4	7.4	12.2	7.6	13.2
	in metres	Vert	-		13		26		35		42		47		52		56	
5	Lit / sec / metre		65		125		185		250		310		375		435		495	
	NR		-		14		27		36		43		48		53		57	
	Throw	Hor.	0.6	4	2.4	7.4	4	9.2	5.6	10.4	6.8	11.6	7.4	12.8	8	13.8	8.6	14.6
	in metres	Vert	2.8		5.2		7.6		9.6		10.4		11.6		12.6		13.2	
6	Lit / sec / metre		75		150		225		300		375		445		520		595	
	NR		-		15		28		37		44		49		54		58	
	Throw	Hor.	1	4.4	2.8	8.2	4.6	9.8	5.8	11.4	7.4	12.8	8.2	13.8	8.8	15	9.2	16
	in metres	Vert	2.8		5.8		8.6		10.4		11.6		12.6		13.8		14.6	
7	Lit / sec / metre		90		175		260		350		435		520		610		695	
	NR		-		16		29		38		45		50		55		59	
	Throw	Hor.	1	4.6	3.2	8.6	4.6	10.8	6.4	12.2	8	13.8	8.8	15	9.6	16.2	10.2	17.2
	in metres	Vert	3.2		6.2		9.2		11		12.6		13.8		14.6		16	
8	Lit / sec / metre		100		200		300		400		495		595		695		795	
	NR		-		17		30		39		46		51		56		60	
	Throw	Hor.	1.2	5	3.4	9.6	5	11.4	6.8	13.2	8.6	14.6	9.2	16	10.2	17.2	10.8	18.4
	in metres	Vert	3.4		6.8		9.8		12		13.2		14.6		16		16.8	

FLANGELESS LINEAR SLOT DIFFUSER F-LSD25

PERFORMANCE DATA - F-LSD25 SLOT WIDTH RETURN APPLICATION

No. Slot	Negative Static Pressure in Pascals	5	10	18	27	40	54	70	112
1	Lit / sec / metre	31	47	65	80	95	110	125	155
	NR	-	14	22	28	33	37	41	47
2	Lit / sec / metre	65	95	125	155	185	220	250	310
	NR	-	17	25	31	36	40	44	50
3	Lit / sec / metre	95	140	185	235	280	325	375	465
	NR	-	19	27	33	38	42	46	52
4	Lit / sec / metre	125	185	250	310	375	435	495	620
	NR	-	20	28	34	39	43	47	53
5	Lit / sec / metre	155	235	310	390	465	545	620	775
	NR	-	21	29	35	40	44	48	54
6	Lit / sec / metre	185	280	375	465	560	650	745	930
	NR	-	22	30	36	41	45	49	55
7	Lit / sec / metre	220	325	435	545	650	760	870	1085
	NR	-	23	31	37	42	46	50	56
8	Lit / sec / metre	250	375	495	620	745	870	995	1240
	NR	-	23	31	37	42	46	50	56

