


# AIRFOIL



GRILLES  
DUCT  
FITTINGS

*making it happen sooner...*

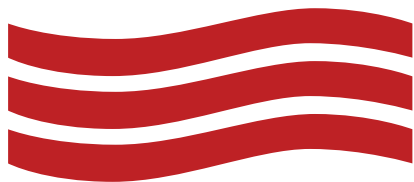

Quality  
Endorsed  
Company  
ISO 9001  
 SAI GLOBAL



**FLEXIBLE DUCT 4-ZERO  
R0.6 PYRO FLEX  
PYF**



## **FLEXIBLE DUCT 4-ZERO 0.6 PYRO FLEX PYF**

### **PRODUCT DESCRIPTION AND APPLICATION**

Airfoil's Australian Made 4-Zero R0.6 Flexible Duct has been tested and meets all requirements of Australian Standards AS 4254.1 2012 and Building Codes of Australia Domestic and Commercial Air Handling Systems.

The Aluminium 4-Zero Inner Core with Metalised Outer surface has a multi-layered construction containing high-level grade Flame Retardant Water based adhesive with high tensile wire helix encapsulated.

The Metalised Outer Layer has a multi-layered construction containing high quality grade flame retardant adhesive. The Polyester Insulation Blanket achieves a thermal rating of R0.6 with a thickness of 25mm.

The operating pressure range is 1000 Pa positive to 200 Pa negative and the operating temperature range is -10C to +80C.

Available sizes are 4", 5", 6", 8" 10", 12", 14", 16", 18", 20" in standard or acoustic and in 3 or 6 metre lengths.

## FLEXIBLE DUCT 4-ZERO 0.6 PYRO FLEX PYF

### PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – PYF**
- Australian Made
- Aluminium Construction
- 4-Zero R0.6 Flexible Duct core
- Meets Australian Standards AS 4254.1 2012 and Building Codes of Australia Domestic and Commercial Air Handling Systems
- 4-Zero Aluminium inner core
- Metalised outer surface
- Multi-layered construction
- High-level grade flame retardant water based adhesive
- High tensile wire helix encapsulated
- Polyester Insulation Blanket R0.6 Thermal Rating (25mm thick)
- Operating pressure range (Pa): 1000 Pa positive to 200 Pa negative
- Operating temperature range: -10°C to +80°C
- Available sizes: 4", 5", 6", 8", 10", 12", 14", 16", 18", 20"
- Standard or Acoustic options
- Available in 3m or 6m lengths
- Airfoil Compliance Certificate available



## FLEXIBLE DUCT 4-ZERO 0.6 PYRO FLEX PYF

### ORDERING CODES

PRODUCT SPECIFICATION CODES			
<b>PYF 4R0.6 6M</b>	4 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 4R0.6 3M</b>	4 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 5R0.6 6M</b>	5 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 5R0.6 3M</b>	5 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 6R0.6 6M</b>	6 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 6R0.6 3M</b>	6 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 8R0.6 6M</b>	8 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 8R0.6 3M</b>	8 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 10R0.6 6M</b>	10 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 10R0.6 3M</b>	10 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 12R0.6 6M</b>	12 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 12R0.6 3M</b>	12 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 14R0.6 6M</b>	14 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 14R0.6 3M</b>	14 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 16R0.6 6M</b>	16 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 16R0.6 3M</b>	16 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 18R0.6 6M</b>	18 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 18R0.6 3M</b>	18 inch 4-ZERO R0.6 Pyro Flex 3 metres
<b>PYF 20R0.6 6M</b>	20 inch 4-ZERO R0.6 Pyro Flex 6 metres	<b>PYF 20R0.6 3M</b>	20 inch 4-ZERO R0.6 Pyro Flex 3 metres



## Compliance Certificate



### 4 ZERO R0.6 Insulated Flexible Duct

Airfoil flexible duct has been tested and meets all requirements of Australian Standards 4254 and Building Codes of Australia for Domestic and Commercial Air Handling Systems.

<b>PRODUCT</b>	RM0.6 Metalised Sleeve, Polyester Flexible Duct (4-Zero).
<b>CONSTRUCTION</b>	Aluminum 4-Zero Inner Core with Metalised Outer surface multi-layered construction containing high level grade Flame Retardant Water based adhesive with high tensile wire helix encapsulated.
<b>METALISED OUTER SLEEVE</b>	Multi-layered construction (Metalised Outer Layer) containing high quality grade flame retardant adhesive.
<b>INSULATION TYPE</b>	Polyester Insulation Blanket to achieve thermal rating of R0.6 (Insulation Thickness 25mm)
<b>LENGTH</b>	6 Metre / 3 Metre lengths
<b>DIAMETERS</b>	4", 5", 6", 8" 10", 12", 14", 16", 18", 20" INCH.
<b>OPTIONS</b>	Standard Plain or Acoustic.
<b>OPERATING PRESSURE RANGE</b>	1000 Pa positive, 200 Pa negative
<b>OPERATING TEMPERATURE RANGE</b>	-10C TO +80C

TEST STANDARD	DESCRIPTION	RESULT
AS/NZS 1530.3 - 1989	Ignitability Index0	0
AS/NZS 1530.3 - 1989	Spread of Flame Index	0
AS/NZS 1530.3 - 1989	Heat Evolved Index	0
AS/NZS 1530.3 - 1989	Smoke Developed Index	0-1
UL181	Burning	Pass
UL181	Mould	Pass
UL181	Temperature	Pass
UL181	Puncture	Pass
UL181	Static Load	Pass
UL181	Impact	Pass
UL181	Pressure	Pass
UL181	Collapse	Pass
UL181	Tension	Pass

The R rating of RM0.6 is measured ex manufacture. Prolonged compression, packaging or stretching of the product will be detrimental to the final R rating of any duct produced.