

# AIRFOIL



GRILLES  
DUCT  
FITTINGS

*making it happen sooner...*



Quality  
Endorsed  
Company  
ISO 9001  
 SAI GLOBAL



**JET DIFFUSER  
JD200**



## JET DIFFUSER JD200

### PRODUCT DESCRIPTION AND APPLICATION

Airfoil's JD200 Australian Made Jet Diffuser is meticulously crafted from 2mm high-grade spun aluminium material. Featuring an outer spun housing frame with a size of 25mm, it comes complete with locking nuts, ensuring efficient functionality. The inner Jet Diffuser cones, welded to a sturdy 10mm aluminium threaded rod, offer seamless connection to the existing outer frame or spiral ductwork.

This highly adaptable Jet Diffuser offers dual functionality, allowing for both "Jet Mode" and "Diffusing Mode" air patterns simply by rotating the inner cone along its 180-degree axis. These versatile modes cater to spot or diverse supply air patterns, with "Jet Mode" throws typically doubling those of the "Diffusing Mode" setting in terms of air velocity.


Designed for high-velocity horizontal or vertical applications, the JD200 boasts the advantage of manual adjustment in both left/right and up/down directions, facilitating positioning to suit various airflow requirements. Whether for long or short airflows, this diffuser finds its place in high ceiling spaces, square or round ductwork, and can be mounted on Airfoil's Jet Diffuser Mounting Plate (JDMP) for added convenience.

This diffuser is available in our standard white range, providing a sleek and neutral aesthetic. However, for those seeking a personalised touch, it can be powder-coated to any specified colour upon request. Perfectly suited for a variety of environments, including airports, shopping centres, universities, auditoriums, cinemas, or any open-plan areas, where efficient high-velocity horizontal or vertical discharge diffusion is essential.

## JET DIFFUSER JD200

### PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – JD200**
- Australian Made and Designed
- Manufactured from 2mm high grade spun aluminium
- Outer flange size 25mm
- Neck rod size 200mm
- Opening size 230mm
- Frame depth 115mm
- 2 modes “ Jet Mode” or Diffusing Mode”
- The “Jet Mode” throws are typically double that of the “Diffusing Mode” setting when estimating air velocity
- Comes complete with outer spun housing frame and locking nuts
- Used for supply air heating and cooling
- Rotating inner cone manually adjusted for left/right or up/down function
- Perfect for long and short air throws
- Product can be fixed to high ceiling spaces, square and round duct work
- Optional Jet Diffuser Mounting Plate (JDMP)
- Available in 6 different sizes
- Available in our standard white powder-coated range
- Special powder-coated colours available on request
- Product suitable for airports, shopping centres, universities, auditoriums, cinemas or any opened planed areas where high velocity horizontal or vertical discharge diffusion is required
- Airfoil tested information available
- **The following metric performance data has been derived from exhaustive testing in elaborate laboratories of acoustic and vibrational engineers Louis A. Challis and Associates Proprietary Limited. Darling Street, Sydney 2000**

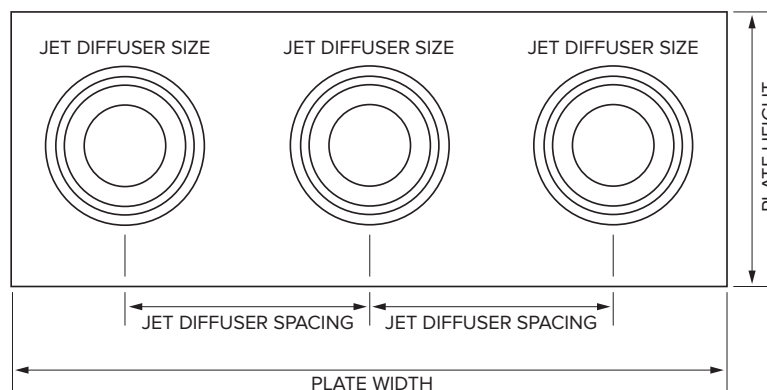



**OPTIONAL JET DIFFUSER MOUNTING PLATE (JDMP)**

## JET DIFFUSER JD200

### CROSS SECTIONAL DIAGRAM

#### JET MODE

#### DIFFUSION MODE

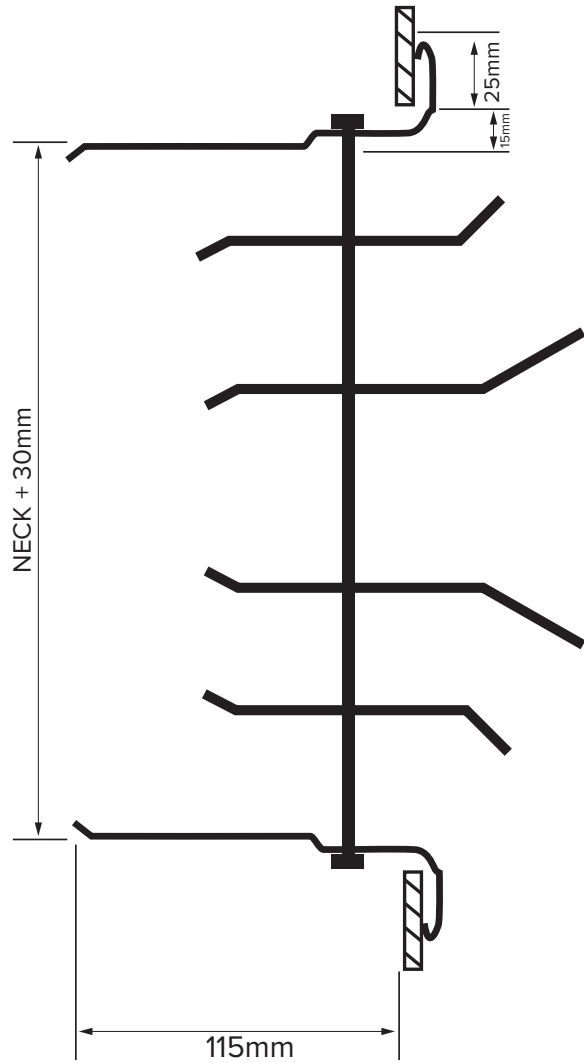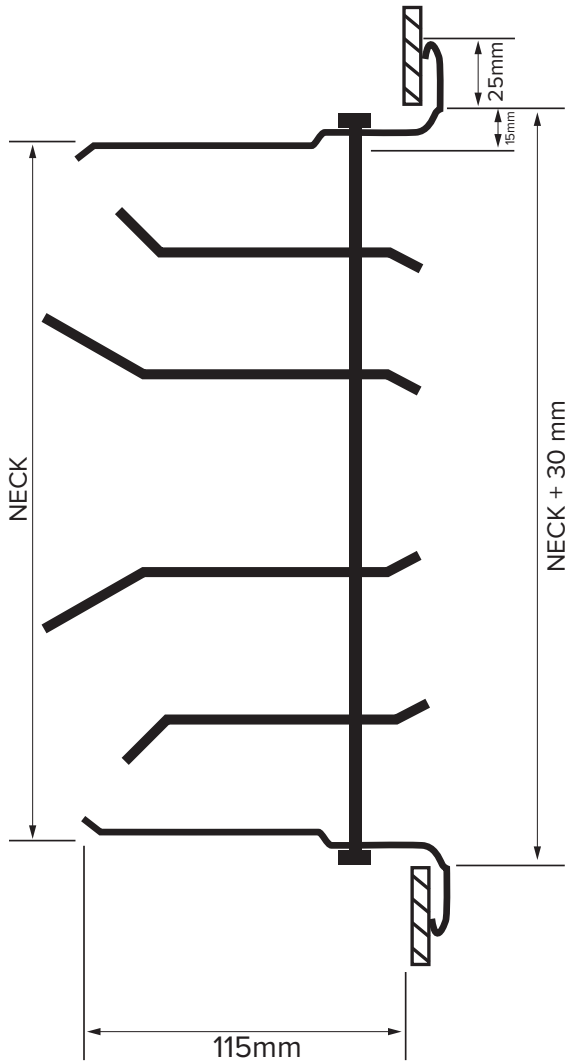

**DISCLAIMER:**

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.

## JET DIFFUSER JD200

### PERFORMANCE DATA

|              |                         |           |     |     |     |     |     |
|--------------|-------------------------|-----------|-----|-----|-----|-----|-----|
| <b>JD200</b> | <b>Lit / sec</b>        |           | 100 | 125 | 150 | 175 | 200 |
|              | <b>NR</b>               |           | 26  | 30  | 34  | 39  | 43  |
|              | Static Pressure Pascals |           | 15  | 23  | 33  | 45  | 60  |
|              | Throw                   | JET       | 4.5 | 5.5 | 6.5 | 8   | 9   |
|              | metres                  | DIFFUSION | 2.3 | 2.8 | 3.3 | 4   | 4.5 |

### JET DIFFUSER - OPTIONAL SIZES

|              |                         |           |     |     |     |     |     |
|--------------|-------------------------|-----------|-----|-----|-----|-----|-----|
| <b>JD150</b> | <b>Lit / sec</b>        |           | 50  | 75  | 100 | 125 | 150 |
|              | <b>NR</b>               |           | 28  | 34  | 38  | 45  | >50 |
|              | Static Pressure Pascals |           | 15  | 28  | 38  | 55  | 70  |
|              | Throw                   | JET       | 3   | 4.2 | 6   | 7.3 | 8.6 |
|              | metres                  | DIFFUSION | 1.5 | 2.1 | 3   | 3.7 | 4.3 |

|              |                         |           |     |     |     |     |     |
|--------------|-------------------------|-----------|-----|-----|-----|-----|-----|
| <b>JD200</b> | <b>Lit / sec</b>        |           | 100 | 125 | 150 | 175 | 200 |
|              | <b>NR</b>               |           | 26  | 30  | 34  | 39  | 43  |
|              | Static Pressure Pascals |           | 15  | 23  | 33  | 45  | 60  |
|              | Throw                   | JET       | 4.5 | 5.5 | 6.5 | 8   | 9   |
|              | metres                  | DIFFUSION | 2.3 | 2.8 | 3.3 | 4   | 4.5 |

|              |                         |           |     |     |     |      |      |
|--------------|-------------------------|-----------|-----|-----|-----|------|------|
| <b>JD250</b> | <b>Lit / sec</b>        |           | 150 | 200 | 250 | 300  | 400  |
|              | <b>NR</b>               |           | 20  | 27  | 33  | 37   | 46   |
|              | Static Pressure Pascals |           | 8   | 15  | 23  | 33   | 60   |
|              | Throw                   | JET       | 5   | 7   | 8.3 | 10.2 | 12.7 |
|              | metres                  | DIFFUSION | 2.5 | 3.5 | 4.2 | 5.1  | 4.6  |

|              |                         |           |     |     |      |      |     |
|--------------|-------------------------|-----------|-----|-----|------|------|-----|
| <b>JD300</b> | <b>Lit / sec</b>        |           | 250 | 300 | 400  | 500  | 600 |
|              | <b>NR</b>               |           | 27  | 28  | 34   | 39   | 45  |
|              | Static Pressure Pascals |           | 10  | 15  | 25   | 40   | 58  |
|              | Throw                   | JET       | 6.3 | 7   | 10.2 | 13.3 | 16  |
|              | metres                  | DIFFUSION | 3.2 | 3.8 | 5.1  | 6.7  | 8   |

|              |                         |           |     |     |      |     |      |
|--------------|-------------------------|-----------|-----|-----|------|-----|------|
| <b>JD350</b> | <b>Lit / sec</b>        |           | 300 | 400 | 600  | 800 | 1000 |
|              | <b>NR</b>               |           | -   | 25  | 35   | 43  | > 50 |
|              | Static Pressure Pascals |           | 5   | 12  | 32   | 60  | 103  |
|              | Throw                   | JET       | 6.5 | 8.8 | 13.8 | 18  | 23   |
|              | metres                  | DIFFUSION | 3.3 | 4.4 | 6.9  | 9   | 11.5 |

|              |                         |           |     |     |     |      |      |
|--------------|-------------------------|-----------|-----|-----|-----|------|------|
| <b>JD400</b> | <b>Lit / sec</b>        |           | 400 | 600 | 800 | 1000 | 1200 |
|              | <b>NR</b>               |           | -   | 28  | 35  | 43   | > 50 |
|              | Static Pressure Pascals |           | 5   | 15  | 33  | 60   | 145  |
|              | Throw                   | JET       | 7.8 | 12  | 16  | 20   | 24   |
|              | metres                  | DIFFUSION | 3.9 | 6   | 8   | 10   | 12   |