

AIRFOIL




GRILLES
DUCT
FITTINGS

making it happen sooner...



Quality
Endorsed
Company
ISO 9001
 SAI GLOBAL

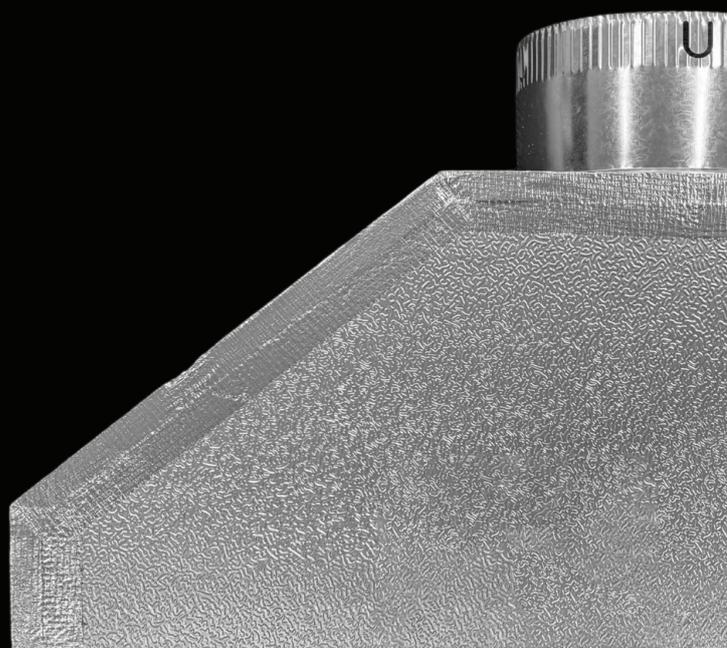

**POLY BOARD
V-BOX - ONE WAY
PB-VB1**



POLY BOARD V-BOX - ONE WAY **PB-VB1**

PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Australian Made 20mm Polyurethane Foam Pre-Insulated Poly Board V-Box One Way (PB-VB1) is a light weight Fire Rated alternative to our Sheet Metal range.

The Poly Board aluminium sheeted exterior is coated with a 2g/m² resistant epoxy varnish further enhancing its insulation qualities guaranteeing durability and reliability.

Available in a range of options and sizes, the V-Box One Way is designed to connect directly onto any specified air conditioning unit and can be tailored to suit specific needs.

Suitable for both commercial and domestic settings, where thermal and acoustic requirements are paramount, it stands as a testament to Airfoil's commitment to excellence in Poly Board solutions.

POLY BOARD V-BOX - ONE WAY PB-VB1

PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – PB-VB1**
- Australian Made and Designed
- Custom box widths and heights manufactured to suit air conditioning unit requirements (opening size)
- Available with optional Volume Control Damper Blade
- Mounted to air conditioning unit
- Manufactured from 20mm Polyurethane Foam (Pre-Insulated)
- Aluminium Outside / Black-Faced internal
- R-Value
- Light weight
- Coated with 2g/m² resistant epoxy varnish
- Density = 66kg/m³
- Available with optional 20mm C-Extrusions cover attachment trim
- Easy installation
- Acoustic qualities
- Thermal qualities
- Customised oval spigots available to suit varying box height restrictions
- Spigot sizes available are 100mm, 150mm, 200mm, 250mm, 300mm, 350mm, 400mm, 450mm, 500mm, 550mm and 600mm diameters
- Used for supply and return air in heating and cooling
- **Tested information available (AWTA)**
- Available in two or three way configurations
- Consult sales team for specific V-Box sizes



POLY BOARD V-BOX - ONE WAY PB-VB1

V-BOX CONFIGURATION OPTIONS



V-Box One Way (PB-VB1)



V-Box Two Way (PB-VB2)



V-Box Three Way (PB-VB3)




DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.


POLY BOARD V-BOX - ONE WAY PB-VB1

PU FOAM PRE-INSULATED PANEL (20MM THICK)

Polyurethane Foam Pre-insulated Panels consists of 20 mm thickness with aluminium foil, aluminium sheet or Galvanised Iron on both or either sides. The aluminium foil is coated with a 2g/m² layer of corrosion-resistant epoxy varnish paint which also acts to reduce fungus and mold growth.

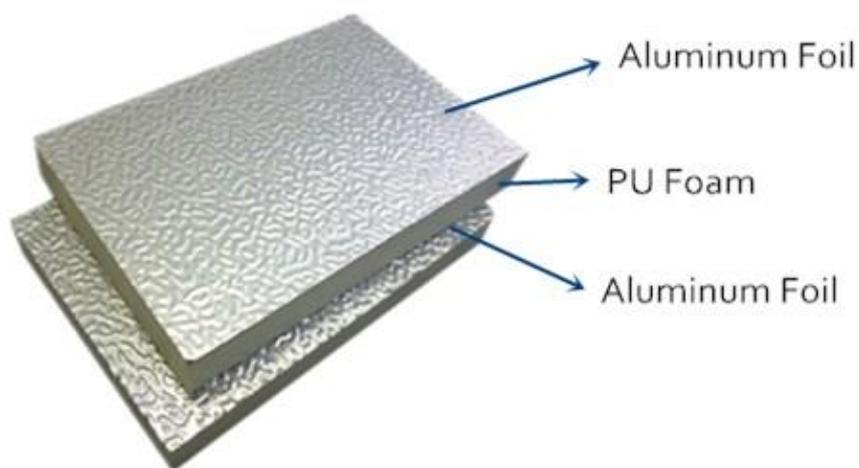


The aluminum foil can be produced in silver, white or black colour, with a smooth or embossed finish. The surface of the panel also can be aluminum sheet, GI or printed color steel, as per the images below:

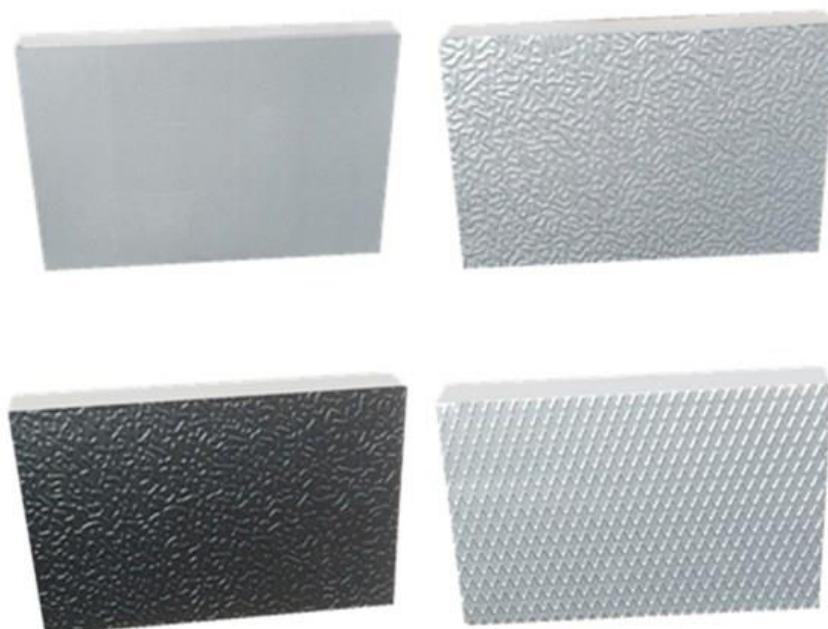

POLY BOARD V-BOX - ONE WAY PB-VB1

TECHNICAL DATA PU FOAM PRE-INSULATED PANEL (20MM THICK)

| PROPERTY | UNIT | SPECIFICATION |
|-----------------------------|-------------------|--------------------------------------|
| Standard Size | mm | 3950*1200*20 |
| Foam Density | kg/m ³ | 50-55 |
| Aluminium Foil Thickness | micron | 80 |
| Aluminium Sheet Thickness | micron | 200 |
| Thermal Conductivity | W/m.K | 0.02 |
| Thermal Resistance | R-Value | R1.0 (AS/NZS 4859 - ASTM C518 -2017) |
| Fire Rating | 3 Zero | AS/NZS 1530.3-1999 |
| Compressive Strength | Mpa | 0.25 |
| Bending Strength | Mpa | 2 |
| Water Absorption | % | 0.01 |
| Dimension Change | % | 0.3 |
| Maximum Wind Velocity | m/s | 13-20 |
| Maximum Running Temperature | °C | 80 |

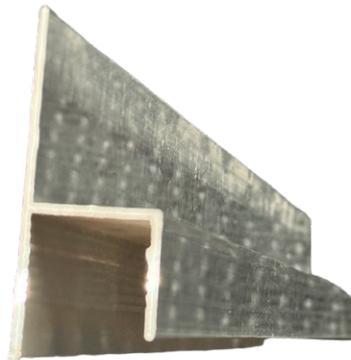

OPTIONAL C-EXTRUSION COVER ATTACHMENT TRIM