

AIRFOIL



GRILLES
DUCT
FITTINGS

making it happen sooner...



Quality
Endorsed
Company
ISO 9001
 SAI GLOBAL



**HINGED LINEAR BAR GRILLE
WITH FILTER
H-LBG-00-F 20MM FLANGE**



HINGED LINEAR BAR GRILLE WITH FILTER **H-LBG-00-F 20MM FLANGE**

PRODUCT DESCRIPTION AND APPLICATION

Airfoil's Australian Made and designed Hinged Linear Bar Grille with Filter H-LBG-00-F (20mm Flange), stands out as a remarkable architectural product and is highly sought after by customers. Crafted from premium aluminium extruded profiles, this grille can be customised to fit any dimensions. Primarily used for ceiling-mounted Return Air applications, this bar grille includes a 12mm Filter as standard.

Its standout feature is the stylish and refined 20mm x 3mm Flat Bar blades, arranged at the standard 12mm pitch. The Zero Degree flat bar blades ensure consistent airflow without deviation, maximising the grille's return air capacity through its face. The blade systems are arranged using a round aluminium spaced tube for added support and strength. These systems are attached to the grille's inner hinged frame through a robust industrial rivet system.

With a slimline 20mm frame that provides an attractive appearance, the grille's outer frame depth is 50mm. The sturdy outer frame includes spring clips allowing for the simple installation of the hinged core centre by clicking it in place.

This user-friendly grille, which features a filter, is ordered based on blade length followed by height and can be custom powder-coated in a colour of choice. Ideal for both domestic and commercial settings where a Return Air Application is required, this architectural marvel offers both functionality and aesthetic appeal.

HINGED LINEAR BAR GRILLE WITH FILTER H-LBG-00-F 20MM FLANGE


PRODUCT SPECIFICATIONS AND INFORMATION

- **Product ordering code – H-LBG-00-F (20mm Flange)**
- Australian Made and Designed
- Return Air application
- Aluminium Construction
- Manufactured to any size
- Hinged Core for easy installation and access
- Order blade length first, then by height
- Hinged on the long side as standard
- 20mm frame
- 50mm deep frame
- 20mm x 3mm flat bar blade
- 12mm blade spacing as standard (alternate blade spacing available)
- Blades are held via an aluminium spaced tube supporting mullion
- Wall or ceiling mounted installation
- Powder-coated standard white or in our Natural Anodised silver finish
- Special powder-coating colours available upon request
- Product suitable for all domestic and commercial settings
- Airfoil tested information available
- **The following metric performance data has been derived from exhaustive testing in elaborate laboratories of acoustic and vibrational engineers Louis A. Challis and Associates Proprietary Limited. Darling Street, Sydney 2000**



HINGED LINEAR BAR GRILLE WITH FILTER H-LBG-00-F 20MM FLANGE

CROSS SECTIONAL DIAGRAM

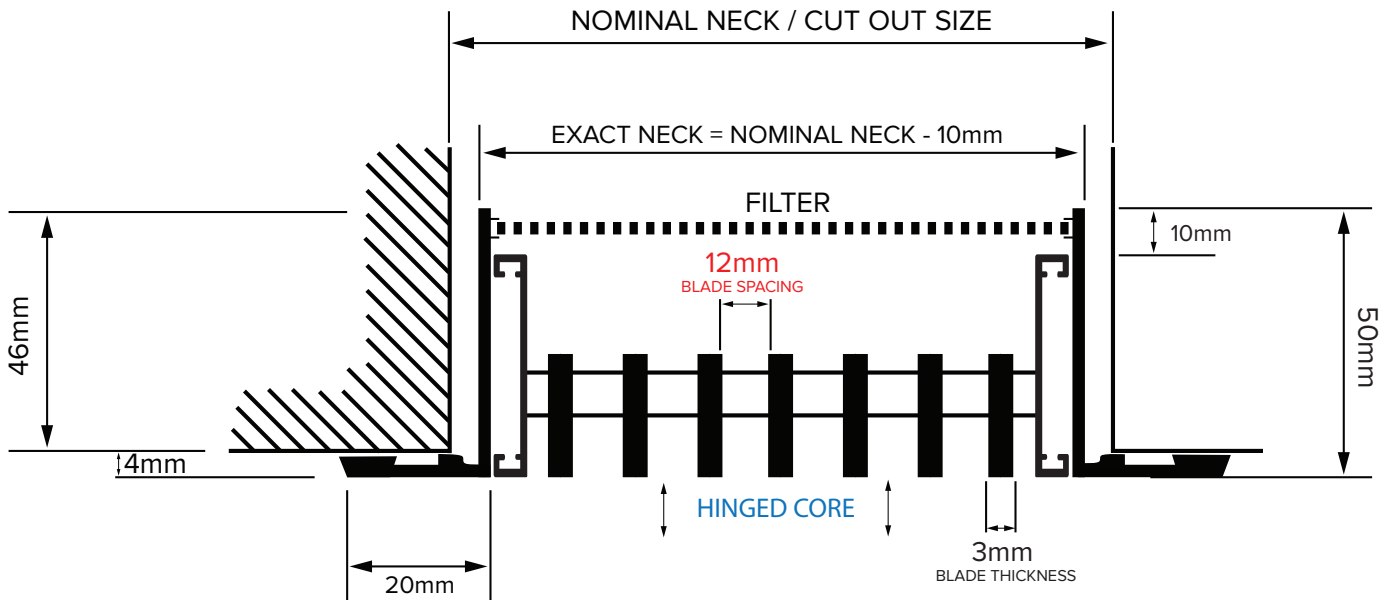

DISCLAIMER:

All product designs, data sheets and specifications presented herein are the intellectual property of Airfoil Manufacturing Pty Ltd. These designs and specifications, including but not limited to diagrams, drawings, and performance data, are protected under Australian intellectual property laws. No part of these designs and specifications may be copied, reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Airfoil Manufacturing Pty Ltd. Unauthorised use or reproduction of these materials may result in legal action under Australian copyright and intellectual property laws.

HINGED LINEAR BAR GRILLE WITH FILTER H-LBG-00-F 20MM FLANGE

PERFORMANCE DATA – SUPPLY AIR

Neck Size	Total Pressure (pa)	3	5	9	14	20	27	36	45
50mm	Lit/sec/metre	34	51	68	85	100	110	130	150
	Throw min/max (m)	1.2-2.4	2.1-4.3	3-5.8	3.9-7.2	4.8-8.4	5.7-9.4	6.3-10.1	6.6-10.8
	Noise Rating NR	-	14	15	21	26	30	34	37
75mm	Lit/sec/metre	58	89	110	140	170	200	230	270
	Throw min/max (m)	2.1-3.6	3.0-5.0	4.5-6.7	5.4-8.4	6.6-9.4	8.1-10.8	9.0-12.2	10.5-13.7
	Noise Rating NR	-	-	14	20	25	29	33	36
100mm	Lit/sec/metre	86	120	170	210	250	300	340	380
	Throw min/max (m)	2.7-3.8	4.5-6.0	5.7-7.7	7.2-9.1	9.0-10.8	9.9-12.2	10.8-13.4	12.6-15.4
	Noise Rating NR	-	-	15	21	26	30	34	37
150mm	Lit/sec/metre	130	210	270	340	410	480	550	620
	Throw min/max (m)	4.3-5.5	6.4-7.3	7.8-8.8	9.8-10.6	11.7-12.5	13.6-14.3	14.7-15	16.6-16.8
	Noise Rating NR	-	-	21	22	27	31	35	38

Sound values are based on a room absorption of 8 dB, re 10^{-12} watts for an active length of **3 metres**.

Horizontal Throw distances indicated are terminal velocities of 0.25 and 0.75 metres per second for an active length of **3 metres**. The following corrections for length should be made.

Active length in metres NR	0.3 subtract 9	0.6 subtract 7	1.2 subtract 4	2 subtract 1	3 table value	4 add 1	6 add 3
Throw at term vel. .075	multiply throw by 0.3		multiply throw by 0.7		table values		
Throw at term vel. .025	multiply throw by 0.6		multiply throw by 0.8		table values		

When used as a **Return Air Grille** the following corrections should be made.

1. NR value increases by 4.

2. Negative Static Pressure = Total Pressure (shown in the table) x 0.8

HINGED LINEAR BAR GRILLE WITH FILTER H-LBG-00-F 20MM FLANGE

PERFORMANCE DATA – SUPPLY AIR

Neck Size	Total Pressure (pa)	5	10	20	30	40	50	60	70
100mm	Lit/sec/metre	140	210	300	360	415	470	520	565
	Throw (m) 0.25m/s to 0.75m/s	3.3-5.9	4.4-7.2	6.4-9.6	7.8-11.5	9-13.5	10.5-15	12-15.5	13.5-16
	Noise Rating NR	<15	<15	28	32	37	40	44	46
150mm	Lit/sec/metre	230	320	460	575	670	750	820	900
	Throw (m) 0.25m/s to 0.75m/s	4.5-6.5	6-8	8.5-11.5	9.9-13	11-14.5	12-16	13.5-17	15-19
	Noise Rating NR	<15	<15	28	32	38	41	44	48
200mm	Lit/sec/metre	310	400	565	680	785	865	950	1020
	Throw (m) 0.25m/s to 0.75m/s	3.2-6.5	4.7-9.2	6.4-13	8.5-15.5	9-18.5	9.5-19.5	10.5-21	11.5-23
	Noise Rating NR	<15	28	37	40	43	46	47	50
250mm	Lit/sec/metre	425	530	760	920	1035	1150	1270	1400
	Throw (m) 0.25m/s to 0.75m/s	2.9-5.5	4.5-9	6.5-13	8-15.5	10.5-18.5	11-20	12-23	13-25
	Noise Rating NR	21	31	37	40	44	46	48	51
300mm	Lit/sec/metre	505	690	920	1210	1380	1550	1650	1820
	Throw (m) 0.25m/s to 0.75m/s	3.5-6.5	5.2-10	6.8-13.5	8.4-16.5	10.5-21	12-23	13-25	13.5-26
	Noise Rating NR	21	26	36	40	43	46	47	52
400mm	Lit/sec/metre	665	860	1150	1400	1625	1850	2025	2170
	Throw (m) 0.25m/s to 0.75m/s	3.5-6.5	5-10	8-15	9-17	11-21	12-24	13-26	14-28
	Noise Rating NR	21	26	36	40	43	46	47	52

Horizontal Throw distances indicated are terminal velocities of 0.25 and 0.75 metres per second for an active length of **1.2 metres**.

For Return or Exhaust air, Pressure drop and Noise levels may be calculated by using the following formula.
Static Pressure Drop - Return Air = Static Pressure (Pa) X 1.5 & NR Return Air = NR + 9